

TYPE GA-H

Ground Connector

For Copper Cable to "H" Beam or Square Fence Post

High copper alloy ground connector for joining a wide range of cable parallel to "H" beams or square tube. Hardware is made from DURIMUM™ for superior corrosion protection.



Figure 1



Figure 2

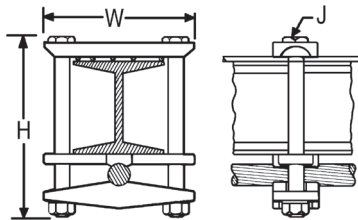


Figure 1

Catalog Number	Figure	Accommodates		H	J	W
		"H" Beam	Copper Conductor			
GA25H26	1	1-7/8" - 2-1/2" X 2-1/2"	4 Sol. - 2/0 Str.	4-3/4	3/8	4

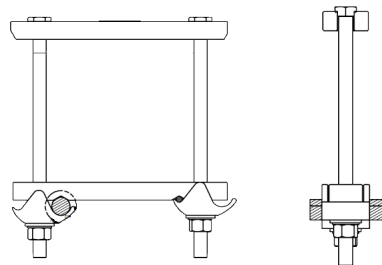
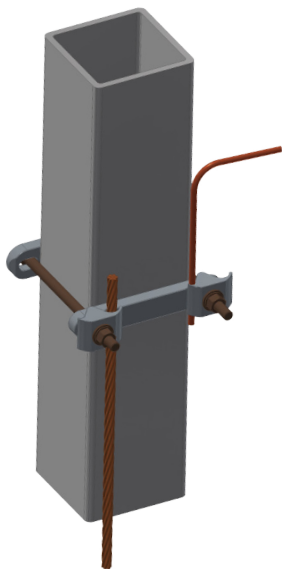


Figure 2

Catalog Number	Figure	Accommodates			H	J	W	Recommended Torque in-lb
		Square Fence Post	Copper Conductor					
			Small Clamp	Large Clamp				
GA400H294CTN	2	4"	6 Sol. (.162) - 4 Str. (.232)	2/0 Sol. (.365) - 250 kcmil (.575)	6.75 (171)	3/8	6.06 (154)	Small Clamp: 240 Large Clamp: 480

Blue highlighted items are industry standard and most frequently ordered.