



**GAI-TRONICS®**  
A HUBBELL COMPANY

# I/O Termination Connection Module Kit for LE200-RM

Model 12118-012

## Confidentiality Notice

This manual is provided solely as an operational, installation, and maintenance guide and contains sensitive business and technical information that is confidential and proprietary to GAI-Tronics. GAI-Tronics retains all intellectual property and other rights in or to the information contained herein, and such information may only be used in connection with the operation of your GAI-Tronics product or system. This manual may not be disclosed in any form, in whole or in part, directly or indirectly, to any third party.

## General Information

The Model 12118-012 I/O Termination Connection Module Kit provides field wire termination for the audio lines of the LE200-RM Rack-Mounted Line Extender. This kit includes the following components:

Qty	Description
1	Line Extender I/O Termination Connection Module
1	DB25 Cable Assembly, 2.5-foot

The connection module is DIN rail mountable and is mounted in the cabinet rack where the LE200-RM Line Extender is installed. The DB25 cable assembly connects J1 of the Connection Module to J3 on the rear of the LE200-RM. Field wiring of outputs is made to terminal blocks TB1 through TB7 and field wiring of inputs is made to terminal blocks TB8 and TB9.

## Installation

1. Snap the I/O Connection Module to the DIN rail within 2.5 feet of the LE200-RM Line Extender.
2. Plug one end of the DB25 cable assembly into J1 of the I/O Connection Module and secure it by tightening the DB25 connector jackscrews. See Figure 1.

**MODEL 12118-012 CONNECTION MODULE KIT – I/O TERMINATION**

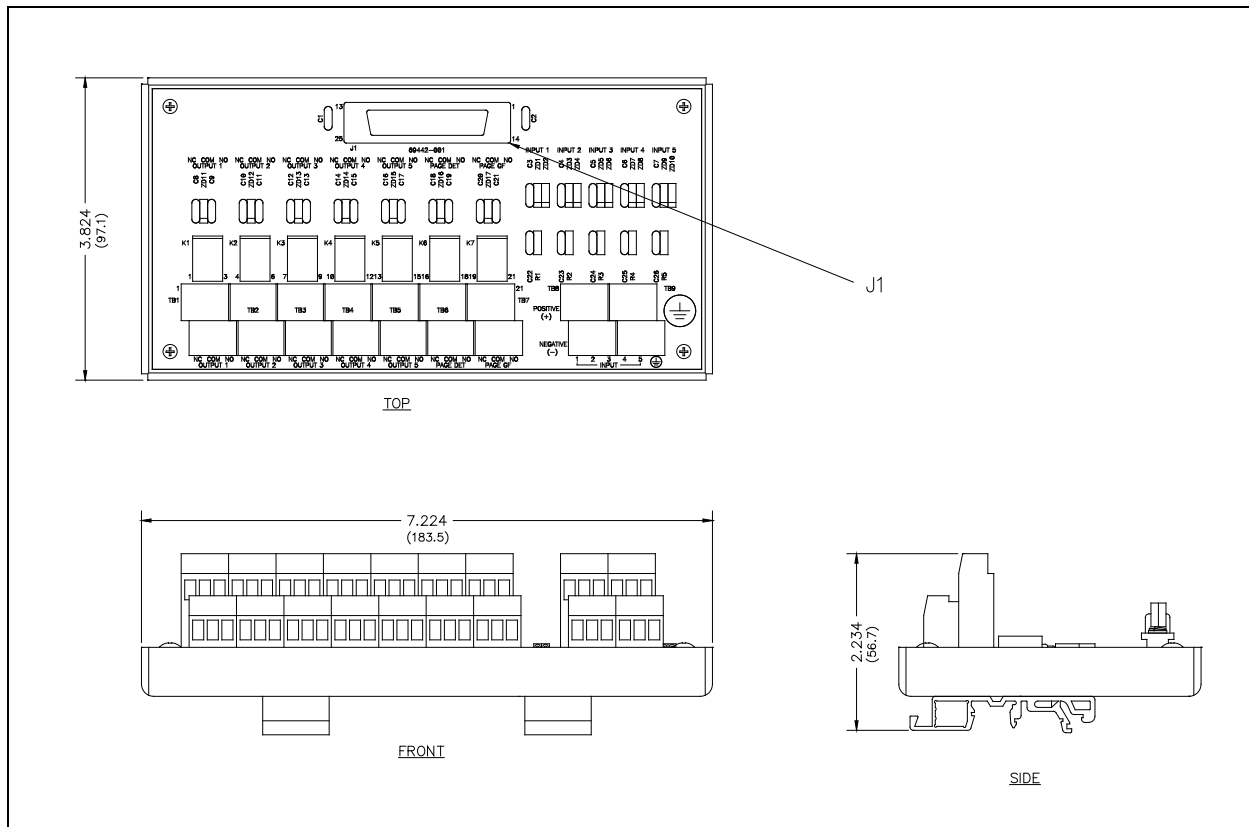


Figure 1. Line Extender Audio Termination Connection Module

3. Plug the other end of the DB25 cable assembly into J3 (I/O) on the rear of the LE200-RM Line Extender as shown in Figure 2, and secure it by tightening the DB25 connector jackscrews.

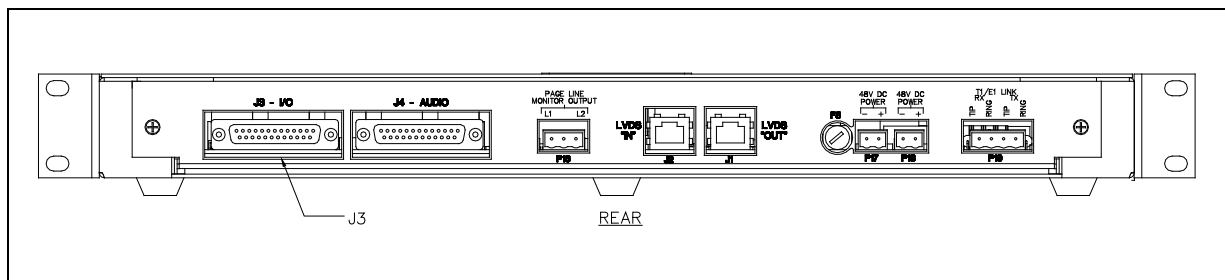


Figure 2. LE200-RM Line Extender Rear Panel

4. Refer to Table 1 and Table 2 for field wiring connections to the I/O Connection Module.
5. Refer to the LE200-RM manual (GTC Pub. 42004-392) for additional operational information.

Table 1. Auxiliary Input Connections

Terminal	Designator	Description
TB8	Input 1 (+)	Auxiliary input contact 1
TB8	Input 1 (-)	
TB8	Input 2 (+)	Auxiliary input contact 2
TB8	Input 2 (-)	
TB8	Input 3 (+)	Auxiliary input contact 3
TB8	Input 3 (-)	
TB9	Input 4 (+)	Auxiliary input contact 4
TB9	Input 4 (-)	
TB9	Input 5 (+)	Auxiliary input contact 5
TB9	Input 5 (-)	

Table 2. Output Contact Connections

Designator	Type	Function
TB1	Terminal block	Field connections for contact output 1. The board's silkscreen indicates the connections; the pin numbers are not labeled.
TB2	Terminal block	Field connections for contact output 2. The board's silkscreen indicates the connections; the pin numbers are not labeled.
TB3	Terminal block	Field connections for contact output 3. The board's silkscreen indicates the connections; the pin numbers are not labeled.
TB4	Terminal block	Field connections for contact output 4. The board's silkscreen indicates the connections; the pin numbers are not labeled.
TB5	Terminal block	Field connections for contact output 5. The board's silkscreen indicates the connections; the pin numbers are not labeled.
TB6	Terminal block	Field connections for page audio detected contact output. The board's silkscreen indicates the connections; the pin numbers are not labeled.
TB7	Terminal block	Field connections for page ground fault contact output. The board's silkscreen indicates the connections; the pin numbers are not labeled.

# Warranty

---

Equipment. GAI-Tronics warrants for a period of one (1) year from the date of shipment, that any GAI-Tronics equipment supplied hereunder shall be free of defects in material and workmanship, shall comply with the then-current product specifications and product literature, and if applicable, shall be fit for the purpose specified in the agreed-upon quotation or proposal document. If (a) Seller's goods prove to be defective in workmanship and/or material under normal and proper usage, or unfit for the purpose specified and agreed upon, and (b) Buyer's claim is made within the warranty period set forth above, Buyer may return such goods to GAI-Tronics' nearest depot repair facility, freight prepaid, at which time they will be repaired or replaced, at Seller's option, without charge to Buyer. Repair or replacement shall be Buyer's sole and exclusive remedy. The warranty period on any repaired or replacement equipment shall be the greater of the ninety (90) day repair warranty or one (1) year from the date the original equipment was shipped. In no event shall GAI-Tronics warranty obligations with respect to equipment exceed 100% of the total cost of the equipment supplied hereunder. Buyer may also be entitled to the manufacturer's warranty on any third-party goods supplied by GAI-Tronics hereunder. The applicability of any such third-party warranty will be determined by GAI-Tronics.

Services. Any services GAI-Tronics provides hereunder, whether directly or through subcontractors, shall be performed in accordance with the standard of care with which such services are normally provided in the industry. If the services fail to meet the applicable industry standard, GAI-Tronics will re-perform such services at no cost to buyer to correct said deficiency to Company's satisfaction provided any and all issues are identified prior to the demobilization of the Contractor's personnel from the work site. Re-performance of services shall be Buyer's sole and exclusive remedy, and in no event shall GAI-Tronics warranty obligations with respect to services exceed 100% of the total cost of the services provided hereunder.

Warranty Periods. Every claim by Buyer alleging a defect in the goods and/or services provided hereunder shall be deemed waived unless such claim is made in writing within the applicable warranty periods as set forth above. Provided, however, that if the defect complained of is latent and not discoverable within the above warranty periods, every claim arising on account of such latent defect shall be deemed waived unless it is made in writing within a reasonable time after such latent defect is or should have been discovered by Buyer.

Limitations / Exclusions. The warranties herein shall not apply to, and GAI-Tronics shall not be responsible for, any damage to the goods or failure of the services supplied hereunder, to the extent caused by Buyer's neglect, failure to follow operational and maintenance procedures provided with the equipment, or the use of technicians not specifically authorized by GAI-Tronics to maintain or service the equipment. **THE WARRANTIES AND REMEDIES CONTAINED HEREIN ARE IN LIEU OF AND EXCLUDE ALL OTHER WARRANTIES AND REMEDIES, WHETHER EXPRESS OR IMPLIED BY OPERATION OF LAW OR OTHERWISE, INCLUDING ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

## Return Policy

---

If the equipment requires service, contact your Regional Service Center for a return authorization number (RA#). Equipment should be shipped prepaid to GAI-Tronics with a return authorization number and a purchase order number. If the equipment is under warranty, repairs or a replacement will be made in accordance with the warranty policy set forth above. Please include a written explanation of all defects to assist our technicians in their troubleshooting efforts.

Call 800-492-1212 (inside the USA) or 610-777-1374 (outside the USA) for help identifying the Regional Service Center closest to you.