

751-901 SmartSeries® Speaker Amplifier

General Information

This manual is provided as a simple installation guide for the 751-901 SmartSeries® Speaker Amplifier. For the complete installation, operation and maintenance manual please visit <http://www.gai-tronics.com/manuals>.

| | |
|------------------------|---|
| Temperature range..... | -22° F to +158° F (-30° C to +70° C), operating and storage |
| Temperature code..... | T4 |
| Dimensions..... | 8.12 H × 8.12 W × 3.12 D inches (206.0 × 206.0 × 78.7 mm) overall |
| Packaged weight..... | 6.1 lbs. (2.8 kg) |
| Net weight..... | 5.1 lbs. (2.3 kg) |

Installation

⚠ CAUTION ⚠ This equipment is suitable for use in Class I, Division 2, Groups A, B, C and D or non-hazardous locations only when used with listed GAI-Tronics 702 or 703 Series 120 V ac enclosures or; Class I, Div. 2, Groups A, B, C, D; Class II, Div. 2, Groups F and G; Class III, Div. 2, when used with listed GAI-Tronics 732, 7325, 733, 7335 or 758 Series 120 V ac enclosures. Combinations of equipment in your system are subject to investigation by the local Authority Having Jurisdiction at the time of installation. See full product manual for additional information at www.gai-tronics.com.

This speaker amplifier mates directly with the 702, 703, 732, 733, or 758 Series amplifier enclosures and is suitable for indoor or outdoor use.

The 751-901 SmartSeries® Speaker Amplifier plugs directly into the enclosure. Use extra care not to damage the protruding latch wings of connector J2 located on the bottom edge of the amplifier during installation. The following figure shows installation and adjustment details. Please refer to it when you are installing and adjusting the amplifier.

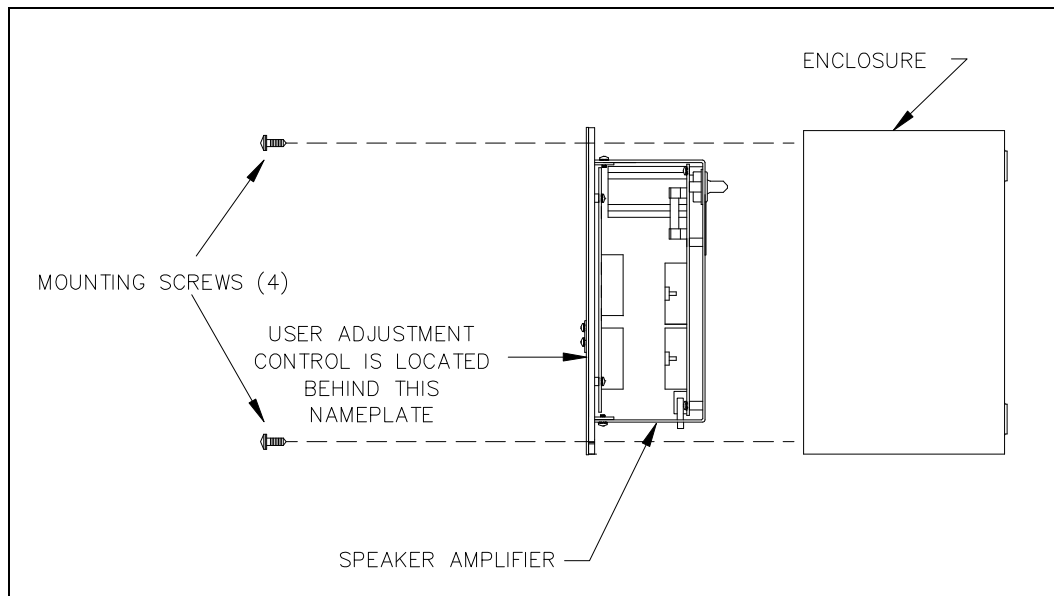


Figure 1.