

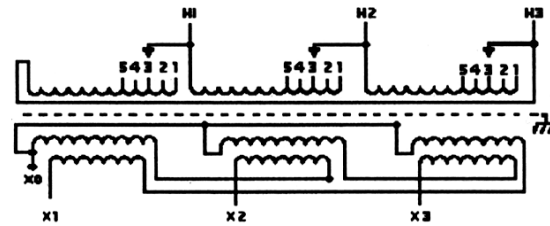


# Revisions

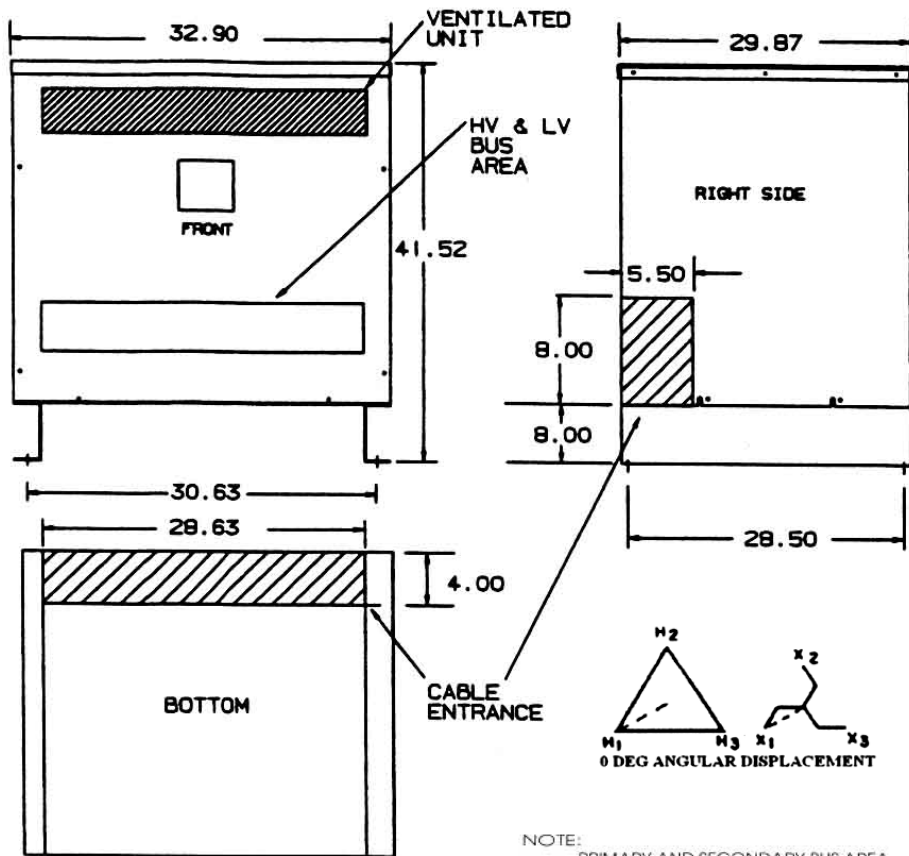

PRIMARY VOLTS	%	CONNECT LEADS TO TAP NO.
504	105	1
492	102.5	2
480	100	3
468	97.5	4
456	95	5

PRIMARY LINES TO H1-H2-H3,  
 SECONDARY LINES TO X0-X1-X2-X3  
 CAUTION: KEEP 3 TAP CONNECTIONS IN SAME POSITION WHEN TRANSFORMER IS IN OPERATION



NOTE: PRIMARY AND SECONDARY BUS AREA IN FRONT OF CASE.

KEY: DENOTES CONDUIT AREAS



Type No. CMTI533154S

Weather Shield – WS-A-4

KVA	CATALOG NUMBER	VOLTAGE		Windings	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
112.5	<b>CMTI533154S</b>	480Δ	208Y/120	CU	1180 Lbs	3φ	60 Hz

### TYPICAL PERFORMANCE DATA

Winding Rise	150°C
Insulation	220°C
Sound Level	50 dB

Regulation @ 100% PF	0.230%
----------------------	--------

Impedance	3.387%
-----------	--------

Typical Efficiency	97.87%
No Load Losses	391 W
Full Load Losses	2446 W