Ø



## **4L-S-D**MOD™ 4 LED SURFACE DIRECT

#### **FEATURES**

- Variable Intensity technology provides a range of specifiable outputs and resulting fixture wattages
- · 2 SDCM color consistency
- · End cap design eliminates visible diffuser seams/gaps












DATE: LOCATION:

TYPE: PROJECT:

### MODX

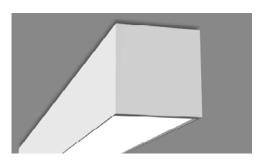

#### RELATED PRODUCTS

SERVICE PROGRAMS

8 2L-S-D

CATALOG #:

8 3L-S-D

8 6L-S-D



#### **SPECIFICATIONS**

#### CONSTRUCTION

- Housing constructed from extruded aluminum
- End caps constructed from die cast aluminum with magnetic interface
- End caps overlap diffuser at each fixture end to elimate gaps and LED visibility

#### **OPTICAL PERFORMANCE**

- 2 SDCM color consistency, 80 or 90 CRI
- · SOF: Soft diffuse acrylic lens
- REG: ½" regressed softglo lens with painted steel inserts. Output multiplier (.77)
- BWO: White blade baffle with softglo lens overlay. Output multiplier (.70)
- ASYM: Asymmetric Highly transmissive diffuse acrylic lens with linear prisms
- BAT: "Batwing" distribution created from highly transmissive diffuse acrylic lens with linear prisms
- DRP: 1/2" protruding soft diffuse "drop" lens

#### INSTALLATION

- Illuminated corners available in 90°, 120°, 135°. One piece construction, ready to install, with diffusers that match adjoining fixtures.
   Corner system connectors must be used to form patterns. The length of each outside or inside illuminated corner is 12"
- Fixture weight: 3lbs/ft

#### **ELECTRICAL**

- Variable Intensity (VI) technology allows precise specification of fixture output/ wattage. Fixture will be programmed and labeled to specification. Indirect and direct hemispheres can be independently specified
- LED boards and drivers can be accessed and removed from fixture, while installed
- Entire LED module can be removed and replaced
- 1C (1 Circuit) Fixture wired for a single circuit
- Emergency Battery: 10W battery powered driver. Provides a minimum of 90 minutes of emergency lighting. Inverter-Compatible. Provided by others. Available in 4'+' fixtures. Test switch located on side of housing

#### **CONTROLS**

- · Sensors install between diffusers
- NX Distributed Intelligence™: Supports indoor and outdoor applications, wired, wireless and hybrid networked NX lighting control deployments and enabled emerging applications, such as Hubbell Lighting's SpectraSync™ Color Tuning Technology
- SpectraSync™ Color Tuning Technology: Control your space based on the needs of the application, specific activities throughout the day and preferences of the occupants

#### **CERTIFICATIONS**

- DLC® (DesignLights Consortium) Qualified see www.designlights.org
- · CSA listed for damp location
- IBEW
- AF of L
- UL924
- This product qualifies as a "designated country construction material" per FAR 52.225-11 Buy American-Construction.
   Materials under Trade Agreements effective 8/14/2020. See <u>Buy American Solutions</u>.
   Contact factory for configurations including SpectraSync, NX, or sensors.

#### WARRANTY

- LED boards 5 years
- LED drivers (standard) 5 years
- LED drivers (Lutron) 3 years
- See www.litecontrol.com for details

KEY DATA						
Lumen Range Per Foot	D: 300-1100					
Wattage Range Per Foot	2.6–10.0					
Efficacy Range (LPW)	110–118					
Rated Life (Hours)	L70: >61,000 L90: >61,000					





### 4L-S-D

MOD™ 4 LED SURFACE DIRECT

**ORDERING GUIDE** 

DATE:	LOCATION:
TYPE:	PROJECT:


CATALOG #:

= Service Program



Click icon for a list of Quick-Ship options

Example: 4L-S-D-8-08-SOF-C1-27K-D030-D01-1C-UNV

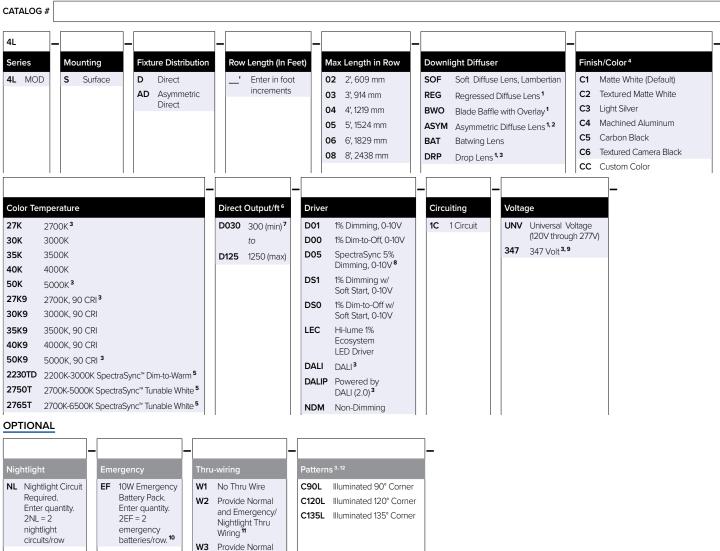

#### Control Options

#### NX Standalone

NXS NX, PIR BT Occupancy/Daylight Sensor, Slide Mount <sup>13, 14, 15</sup>

#### NX Networked - Wired

NXE NX, Dual SmartPORTs 13, 14

NXES NX, PIR BT Occupancy/Daylight Sensor, Slide Mount, Dual SmartPORTs 13,14

Thru Wiring Only

#### NX Networked – Wireless

 ${\bf NXSW} \qquad {\rm NX~Wireless,~PIR~BT~Occupancy/Daylight~Sensor}^{{\bf 13,14,15}}$ 

NXWE NX Wireless Wireless Enabled 13, 14

#### NX Networked - Wired/Wireless

NXSWD NX Wireless, PIR BT Occupancy/Daylight Sensor, Dual SmartPORTs 13, 14, 15

NXWD NX Wireless, Dual SmartPORTs 13, 14

#### Sensors

SD1 Daylight Sensor Required. Enter quantity. 2SD1 = 2 daylight sensors/row
 SO1 Occupancy Sensor Required. Enter quantity. 2SO1 = 2 occupancy sensors/row

#### Notes

- Not Available with Patterns.
- 2 Must be ordered with AD.
- 3 Additional lead time may be applicable. Contact factory.
- 4 Visit <u>www.litecontrol.com/finishes</u> for details.
- 5 Must be ordered with D05 Driver option; excludes 2' lengths and patterns.
- 6 Specifiable in 50 lumen increments. Reference the Performance Data Table for full performance offering and exceptions
- 7 D030 not available in 2'
- 8 Must be ordered with 2230TD, 2750T or 2765T Option
- Excludes Emergency Battery Pack 'EF' Option. Excludes DALI, DALIP and Lutron (LEC) Dimming Drivers
- 10 EF 10W battery powered driver. Provides a minimum of 90 minutes of emergency lighting. Inverter-Compatible. Provided by others.
- 11 Only applicable when specified with Emergency/Nightlight.
- 12 Contact Factory for pattern configurations. Approval drawings required.

#### NX In-Fixture Control Options:

- 13 Not available for row mounting. Only available with 0-10V Driver options. Contact factory for Length restrictions.
- 14 Refer to NX Integrated Controls Reference Table for Functionality of Options.
- 15 NX Sensors with Bluetooth, BLE, provides remote commission only.





### 4L-S-D

MOD™ 4 LED SURFACE DIRECT

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

#### **CONTROLS**

**NX DISTRIBUTED** INTELLIGENCE

#### NX Distributed Intelligence™ Lighting Controls:

Supports both indoor and outdoor applications in a variety of deployment options- wired, wireless, hybrid. Integrates with and enables a wide array of luminaires including those with SpectraSync Color Tuning Technology.

itegrates with and enables a wide analy of idininalies including those with spectrasync Color family recliniology.								
NX INTEGRATED CONTROLS REFERENCE								
NX Option	Sensor	Networkable	Scheduling	Occupancy	Daylight Harvesting	0–10V Dimming	On/off Control	Bluetooth® App Programming
NX Standalone	<u>5</u>							
NXS	NXSMP-SMI	No	Yes	Yes	Yes	Yes	Yes	Yes
NX Networked	I – Wired							
NXE	N/A	Yes	Yes	No	No	Yes	Yes	Requires NXBTC/R <sup>1</sup>
NXES	NXSMP-SMI	Yes	Yes	Yes	Yes	Yes	Yes	Yes
NX Networked	I – Wireless							
NXSW	NXSMP-SMI	Yes	Yes	Yes	Yes	Yes	Yes	Yes
NXWE <sup>2</sup>	N/A	Yes	Yes	No	No	Yes	Yes	No³
NX Networked	NX Networked – Wired/Wireless							
NXSWD	NXSMP-SMI	Yes	Yes	Yes	Yes	Yes	Yes	Yes
NXWD	N/A	Yes	Yes	No	No	Yes	Yes	Requires NXBTC/R <sup>1,3</sup>

- NXBTC/R needs to be plugged into an available NX SmartPort™ on the fixture network
- Programming via App requires factory assistance
- To program NXWE option, need to consult factory. If connected to an area controller, programming can be done from that

#### SpectraSync™ Color Tuning Technology:


Control your space based on the needs of the application, specific activities throughout the day and preferences of the occupants with distinct SpectraSync™ Color Tuning Technologies.



	SPECTRASYNC COLOR TUNING TECHNOLOGY						
Mode	Kelvin Range	Description					
Dim to Warm	2200K-3000K	Mimics the familiar warming effect that occurs with traditional incandescent sources as they are dimmed					
Tunable White	2700K-5000K 2700K-6500K	Offers users the ability to tailor CCT to their personal preference, enhancing task visibility, material and colors or the aesthetics of the space					
Scheduled White	2700K-5000K 2700K-6500K	Mimics the rhythm of natural light or follows an alternative user-defined schedule throughout the day, enhancing an occupant's mood and well-being					

#### SpectraSync Tunable White

Available in two options: 2750T (2700K–5000K) or 2765T (2700K–6500K). Requires two 0-10V controllers, one for intensity and one for CCT. Minimum 5% dimming.

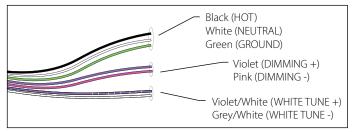


SpectraSync Tunable White luminaires are provided with two 0–10V circuits. The violet and pink circuit is for wiring to any qualified 0–10V controller for dimming. The violet/white and grey/white circuit is for wiring to any qualified 0–10V controller for Tunable White CCT control.

#### Controller Manufacturer Data

SpectraSync Tunable White was designed to be used with sinking style dimmers (provided by others) and is compatible with:

- Hubbell Control Solutions (HCS): NX Distributed Intelligence™ Room Controllers (NXRC) and In-fixture Controllers (NXFM)
- · Lutron: DVTV, DVSTV, and NFTV dimmers
- Wattstopper: ADF120277 and CD4BL (Titan) dimmers

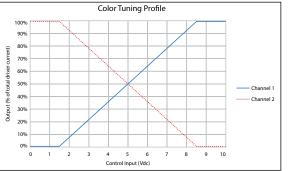







DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #	

#### PERFORMANCE DATA TABLE

The table below shows the delivered lumens for the various lumen outputs. Use this chart in connection with the output multiplier capability to deliver any output required.

quirea.			
Nomenclature	Lumens/Ft	W/Ft	Efficacy
,	Dow	nlight	
D030 (min)	300	2.6	118
D035	350	3.0	118
D040	400	3.4	118
D045	450	3.8	118
D050	500	4.2	118
D055	550	4.7	117
D060	600	4.8	117
D065	650	5.6	116
D070	700	6.1	116
D075	750	6.5	115
D080	800	7.0	115
D085	850	7.5	113
D090	900	7.9	113
D095	950	8.5	112
D100	1000	9.0	112
D105	1050	9.4	111
D110	1100	10.0	110

(wattage may vary up to 5% from published)

#### **Output Restrictions**

Driver options listed below are not available for the output and length as shown.

Postriction	ns - Direct							
Restriction	iis - Direct	300	350	400 450 500			950	1000
	2	LEC, DALI, 347V	LEC, DALI, 347V	DALI, 347V	DALI, 347V	DALI, 347V	LEC	LEC
	3	DALI, 347V	DALI, 347V				LEC	LEC
Longth (foot)	4						LEC	LEC
Length (feet)	5						LEC	LEC
	6						LEC	LEC
	8						LEC	LEC

#### **Output Multiplier Table**

Photometrics for the 4L are published here at a nominal 3500K temperature. This table may be used to approximate the lumen values at different Kelvin temperatures. Power consumption would stay the same.


Option	2700K	3000K	3500K	4000K	5000K	2700K 90 CRI	3000K 90 CRI	3500K 90 CRI	4000K 90 CRI	5000K 90 CRI
SOF	0.95	0.98	1.00	1.03	1.05	0.83	0.85	0.88	0.90	0.93
REG	0.73	0.75	0.77	0.79	0.81	0.64	0.65	0.68	0.69	0.72
BWO	0.67	0.69	0.70	0.72	0.76	0.63	0.53	0.47	0.42	0.39
ASYM	0.95	0.98	1.00	1.03	1.05	0.83	0.85	0.88	0.90	0.93
BAT	0.95	0.98	1.00	1.03	1.05	0.83	0.85	0.88	0.90	0.93
DRP	0.95	0.98	1.00	1.03	1.05	0.83	0.85	0.88	0.90	0.93
LPAD	0.86	0.88	0.90	0.93	0.95	0.75	0.77	0.79	0.81	0.84






DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	


#### **DIMENSIONS**

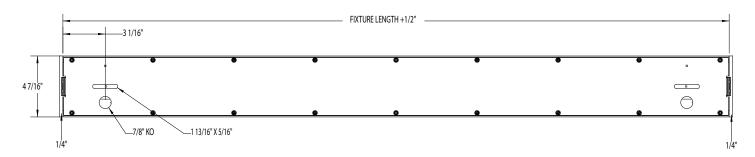

#### INDIVIDUAL MOUNTING

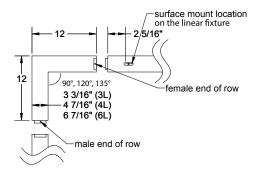

**PATTERNS** 



**END CAP VIEW** 





DATE:	LOCATION:
TYPE:	PROJECT:

#### CATALOG #:

#### **PHOTOMETRY**

#### 4L-S-D-04-SOF-X-CX-35K-D100


#### LUMINAIRE DATA

Description	4L Surface, Soft Diffuse Lens, 3500K
Delivered Lumens	4000
Watts	
Efficacy	112
Mounting	Surface

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
0-40	1885.80	47.1
0-60	3214.60	80.4
0-90	4000.10	100.0
0–180	4000.10	100.0

#### **POLAR GRAPH**

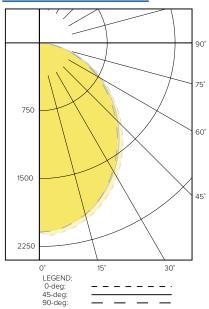

#### 4L-S-AD-XX-XX-ASYM-CX-35K-D050


#### LUMINAIRE DATA

Description	4L Surface, Soft Diffuse Lens, 3500K
Delivered Lumens	2000
Watts	
Efficacy	124
Mounting	Surface

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
0-40	982.00	48.7
0-60	1658.00	82.3
0-90	2016.00	100.0
0-180	2016.00	100.0

#### POLAR GRAPH

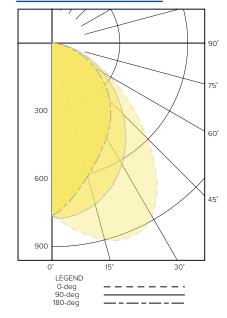



DATE:	LOCATION:
TYPE:	PROJECT:

CATALOG #:

#### PHOTOMETRY CONTINUED

#### 4L-X-D-04-BAT-CX-35K-D100


#### LUMINAIRE DATA

Description	4L Surface, Batwing Lens, 3500K
Delivered Lumens	4000
Watts	
Efficacy	111
Mounting	Surface

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
0-40	1625.84	40.64
0–60	3056.77	76.42
0-90	3948.20	98.70
0-180	4000.17	100.0

#### **POLAR GRAPH**

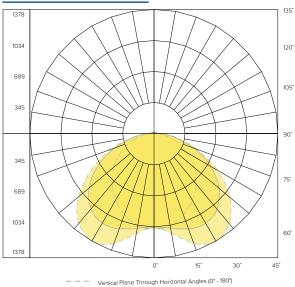

Vertical Plane Through Horizontal Angles (45° - 225°)

— Vertical Plane Through Horizontal Angles (90° - 270°)

#### 4L-X-D-04-DRP-CX-35K-D100


#### **LUMINAIRE DATA**

Description	4L Surface, Drop Lens, 3500K
Delivered Lumens	4000
Watts	
Efficacy	110
Mounting	Surface

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
0-40	1613.08	40.60
0-60	2797.69	70.50
0-90	3677.99	92.70
0–180	3969.32	100.0

#### POLAR GRAPH

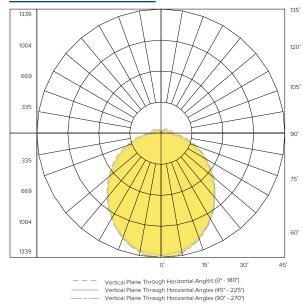




LOCATION: DATE: TYPE: PROJECT:

CATALOG #:

#### TM-30 DATA

#### **COLOR VECTOR GRAPHIC**





TEST RESULTS - 3500K						
Value	80+ CRI					
CCT (K)	3494					
CIE R <sub>a</sub>	83					
D <sub>UV</sub>	-0.0004					
$R_f$	82					
R	96					
Х	0.4052					
У	0.3898					


#### **COLOR CHARACTERISTICS:**

- Reference Illuminant

.,,	Ordering Code								
Value	30K	35K	40K						
Rf	83	82	82						
Rg	96	96	96						
CCT (K)	3009	3494	3975						
Duv	-0.0009	-0.0004	-0.0003						
х	0.435	0.4052	0.3814						
у	0.4012	0.3898	0.3768						
CIE Ra	83 83 84								


Test Source

#### SPECTRAL DISTRIBUTION:

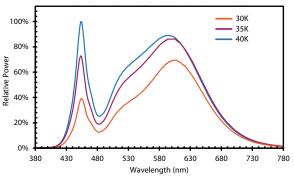


#### **COLOR VECTOR GRAPHIC:**

30K

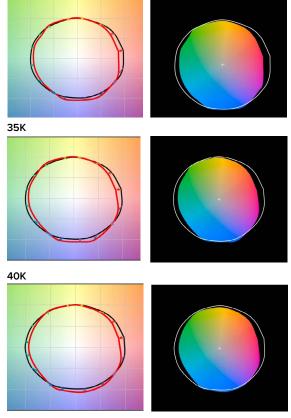

#### COLOR GAMUT/FIDELITY PLOT:

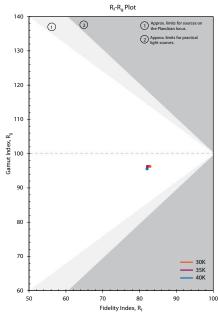

#### CRI: 80 MINIMUM

ССТ	CRI	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
30K	83	82	91	97	81	82	89	84	62	13	79	79	69	84	99
35K	83	81	89	95	81	81	85	86	65	13	73	79	62	83	97
40K	84	82	90	94	82	82	85	87	68	17	74	80	60	84	97



.**D** 

# DATE: LOCATION: TYPE: PROJECT: CATALOG #:

#### **ADDITIONAL INFORMATION**

#### **Driver**

D01	100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
D00	Dim-to-Off 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
D05	100%-5% dimming range, Fixture will be wired for low voltage 0-10V dimming control. Only applicable if either 2230TD, 2750T or 2765T is selected.
DS1	Soft-Start 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
DS0	Soft-Start Dim-to-Off 100%-1% dimming range. Fixture will be wired for low voltage 0-10V dimming control.
LEC	Hi-Lume 1% EcoSystem LED Driver with Soft-On, Fade-to-Black dimming technology.
DALI	DALI compatible.
DALIP	Self-Powered DALI bus (e.g. DEXAL)
NDM	Non-dimming. Fixture will be wired for fixed light output.

#### Rated Life

Tested in accordance to LM79-2008 & derived from EPA TM-21 calculator

L70: 280,000 (calculated per TM-21 extrapolated curve)

L70: >61,000 (reported per TM-21/LM80 6x's limitation)

L90: 72,000 (calculated per TM-21 extrapolated curve)

L90: >61,000 (reported per TM-21/LM80 6x's limitation)

#### Rated Life (Driver)

Standard = 100,000 hours Lutron = 50,000 hours

