

# SRT2 EDGE-LIT

CEILING/SURFACE/GARAGE

## FEATURES

- Edge-lit optical assembly delivers exceptional uniformity over the entire lens with indirect illumination that reduces glare and improves visual comfort
- Low profile housing intended for 8' - 20' mounting heights for surface, trunnion/yoke or pendant mounting
- Applications include parking garage, walkway or building canopies, corridors, tunnels, large stairwells and other interior applications
- Multiple optical distributions are available making the Beacon Edge-Lit luminaire both versatile and functional
- UL/cUL listed for wet locations, IP65



## CONTROL TECHNOLOGY



## SPECIFICATIONS

### HOUSING

- Die-cast aluminum housing ensures long electrical component life and luminaire performance
- Corrosion resistant powder coat finish both protects and provides architectural appearance
- One piece molded silicone gasket ensures weather proof seal
- Thermally isolated driver mounted to dedicated bracket reduces operating temperatures and increases driver life and reliability

### OPTICS

- Edge-lit acrylic light guide provides blended non-pixelated light for unprecedented visual comfort
- Choice of multiple light outputs with lumen range of 4,000–16,000
- Five distribution types: Type V Square, Type V Rectangular, Type V Concentrated, Type V Wide or Asymmetric (Type 3/4)
- Wide variety of CCT's and CRI's offered: 3000K (70CRI), 3000K (80CRI), 3500K (80CRI), 4000K (70CRI), 4000K (80CRI) or 5000K (70 CRI) CCT

### ELECTRICAL

- 120V–277V 50/60Hz with 347V and 480V available
- 0-10V dimming drivers are RoHS compliant and IP66
- Surge protection – Standard 10kA with optional 20kA end of life LED indicator

- Dimming Drivers are standard and dimming leads are extended out of the luminaire unless control options require connection to the dimming leads. Must specify if wiring leads are to be greater than the 24" standard

### INSTALLATION

- Standard quick mount plate over standard 4" square junction box or octagonal box and allows for simplified fixture installation.
- Standard luminaire accepts a rigid or free-swinging 3/4" NPT stem for pendant mount via wet location j-box (by others)
- Optional bird deterrent shroud available for field installation
- Optional trunnion/yoke mount available for field installation

### OPTIONS/CONTROLS

- Standalone occupancy sensor available for on/off or dimming operation
- NX Distributed Intelligence™ available with in fixture wireless control module, features dimming and occupancy sensor
- wiSCAPE® available with in fixture wireless control module, features dimming and occupancy sensor
- UL924 device available for standalone and wireless control override during power interruptions
- Uplight option provides approximately 800 lumens and consumes only 8 additional watts
- Integral battery backup option available with and without heater. Rated for 0°C (without heater) and -30°C (with heater)
- Emergency lighting relay available for generator or central inverter supplied lighting

## RELATED PRODUCTS

- 



## CERTIFICATIONS

- Listed to UL1598 for use in wet location, listed for -40°C to 40°C applications
- IDA approved with zero uplift for 3000K and warmer CCTs
- DLC® (DesignLights Consortium) Qualified. Please refer to the DLC website for specific product qualifications at [www.designlights.org](http://www.designlights.org)
- IP65
- This product qualifies as a "designated country construction material" per FAR 52.225-11 Buy American-Construction Materials under Trade Agreements effective 04/23/2020. See [Buy American Solutions](http://Buy American Solutions)

## WARRANTY

- 5 year warranty
- See [HLI Standard Warranty](http://HLI Standard Warranty) for additional information

KEY DATA	
Lumen Range	4000–16000
Wattage Range	30–140
Efficacy Range (LPW)	110–135
Reported Life (Hours)	50K
Weight lbs. (kg)	15 (5.8)



# SRT2 EDGE-LIT

CEILING/SURFACE/GARAGE

## ORDERING GUIDE

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Example: SRT2-30-3K7-5QW-UNV-BLT-WG

CATALOG #

Series	Engine	CCT	Distribution	Voltage	Color/Finish	Options
SRT2 Edge-Lit Parking Garage Size 2	30 30W Nominal 3800 lm	3K7 3000K, 70 CRI	5QW Type Square Wide <sup>1</sup>	UNV 120V- 277V	BLT Black Matte Textured	WG Wire Guard
	50 50W Nominal 5700 lm	3K8 3000K, 80 CRI	5RW Type 5 Rect. Wide <sup>1</sup>	120 120V	BLS Black Gloss Smooth	UD Uplight Module <sup>7</sup>
	65 65W Nominal 7000 lm	35K8 3500K, 80 CRI	5C Type 5 Concentrated	208 208V	DBT Dark Bronze Matte Textured	F Single Fuse (120, 277, 347V)
	85 85W Nominal 9500 lm	4K7 4000K, 70 CRI	5W Type 5 Wide <sup>4</sup>	240 240V	DBS Dark Bronze Gloss Smooth	F Double Fuse (208, 240, 480V)
	100 100W Nominal 11000 lm	4K8 4000K, 80 CRI	ASY Asymmetric (Type 4) <sup>1</sup>	277 277V	GTT Graphite Matte Textured	E EM Battery Pack (0°C) <sup>2</sup>
	120 120W Nominal 13000 lm	5K7 5000K, 70 CRI		347 347V	LGS Light Grey Gloss Smooth	EH EM Battery w/Heater (-30°C) <sup>2</sup>
	140 140W Nominal 14700 lm			480 480V	PSS Platinum Silver Smooth	DTS Dimming Transfer Switch
					WHT White Matte Textured	LD3 36" Lead Length <sup>5</sup>
					WHS White Gloss Smooth	LD6 72" Lead Length <sup>5</sup>
					VGT Verde Green Textured	LD9 108" Lead Length <sup>5</sup>
					Color Option	SP20K 20kA Surge Protection with End of Life Indicator <sup>3</sup>
					CC Custom Color	LMB Less Mounting Bracket

Control Options		Accessories (Order Separately)	
<b><u>NX Standalone</u></b>		<input type="checkbox"/>	<b>SRT2-WG</b> Wire Guard for SRT2 version
<b>NXOS-12F</b> NX Distributed Intelligence™, PIR Occ. Sensor, Dimming Daylight Harvesting, up to 12' MH <sup>3</sup>		<input type="checkbox"/>	<b>SRT-MB</b> Mounting bracket for pre-installation
<b>NXOS924-12F</b> NX Distributed Intelligence™, PIR Occ. Sensor with UL924 dimming bypass module for controls override, up to 12' MH <sup>3</sup>		<input type="checkbox"/>	<b>SRT2-BS-XXX</b> Bird deterrent shroud for SRT2 version, not available with uplight or trunnion mount
<b><u>NX Networked – Wireless<sup>1</sup></u></b>		<input type="checkbox"/>	<b>SRT2-TM</b> Trunnion/Yoke accessory for SRT2 version
<b>NXWE</b> NX Distributed Intelligence™ Wireless Enabled (module + radio)		<input type="checkbox"/>	<b>SCP-REMOTE</b> Remote control for SCP option; order at least on per project to program and control
<b>NXOSW-12F</b> NX Distributed Intelligence™ Wireless, PIR Occ. Sensor, Dimming Daylight Harvesting, up to 12' MH		<input type="checkbox"/>	<b>SWUSB</b> SiteSync interface software loaded on USB flash drive for use with owner supplied PC (windows based only). Includes SiteSync license, software and USB radio bridge node
<b>NXWE924</b> NX Distributed Intelligence™ Wireless Enabled with UL924 dimming bypass module for controls override <sup>3</sup>		<input type="checkbox"/>	<b>SWTAB</b> Windows tablet and SiteSync interface software. Includes tablet with preloaded software, SiteSync license and USB radio bridge node
<b>NXOSW924-12F</b> NX Distributed Intelligence™ Wireless, PIR Occ. Sensor with UL924 dimming bypass module for controls override, up to 12' MH <sup>3</sup>			
<b><u>wiSCAPE® – Wireless<sup>1</sup></u></b>			
<b>WIR</b> Wireless Controls, wiSCAPE®			
<b>WIRSC</b> wiSCAPE® + occupancy sensor			
<b>WIR924</b> Wireless Controls, wiSCAPE® with UL924 dimming bypass module for controls override <sup>3</sup>			
<b>WIRSC924</b> wiSCAPE® + occupancy sensor with UL924 dimming bypass module for controls override <sup>3</sup>			
<b><u>SiteSync</u></b>			
<b>SWP</b> SiteSync <sup>3,6,9</sup>			
<b>SWPM</b> SiteSync with occupancy sensor <sup>3,6,9</sup>			
<b><u>Sensor Controls</u></b>			
<b>SCP-8F</b> Remote control programmable line voltage sensor (8-12' recommended MH) <sup>2</sup>			
<b>SCP-20F</b> Remote control programmable line voltage sensor (12-20' recommended MH) <sup>2</sup>			
<b>SCP924-8F</b> Programmable sensor with UL924 dimming bypass module for controls override (8-12' recommended MH) <sup>3</sup>			
<b>SCP924-20F</b> Programmable sensor with UL924 dimming bypass module for controls override (12-20' recommended MH) <sup>3</sup>			
<b>BTSO_12</b> Bluetooth Programmable, PIR Occupancy/Daylight Sensor, 360° lens, up to 12' mounting height <sup>8,10</sup>			
Notes:			
1 Up to 85W light engines only	7 Uplight Module (UD) will not be controlled by sensors		
2 Must specify voltage, 120V or 277V	8 Consult Brand for 480 Volt		
3 Not available with uplight (UD)	9 Order at least one SiteSync Interface Accessory SWUSB or SWTAB. Each options contains SiteSync License, GUI and Bridge Node.		
4 100, 120 and 140W light engines only	10 Not available in 30W and 50W		
5 Standard wire lead length 24"			
6 65W and 85W only			

# SRT2 EDGE-LIT

CEILING/SURFACE/GARAGE

## PERFORMANCE DATA

# of LEDs	Engine	DRIVE CURRENT (mA)	SYSTEM WATTS	DISTRIBUTION TYPE	5K (5000K nominal, 70 CRI)					4K (4000K nominal, 70 CRI)					3K (3000K nominal, 70 CRI)				
					LUMENS	LPW*	B	U	G	LUMENS	LPW*	B	U	G	LUMENS	LPW*	B	U	G
280	30	35mA	31.0	5C	3789	122.23	2	0	2	3771	121.65	2	0	2	3626	116.97	2	0	2
				5QW	3686	118.89	2	0	1	3668	118.33	2	0	1	3527	113.77	2	0	1
				ASY	2991	96.48	1	0	2	2976	96.02	1	0	2	2862	92.32	1	0	2
				5RW	3604	116.26	2	0	2	3587	115.71	2	0	2	3449	111.26	2	0	2
	50	55mA	48.1	5C	5684	118.17	2	0	2	5657	117.60	2	0	2	5439	113.08	2	0	2
				5QW	5529	114.94	2	0	1	5502	114.39	2	0	1	5291	109.99	2	0	1
				ASY	4486	93.27	1	0	2	4465	92.82	1	0	2	4293	89.25	1	0	2
				5RW	5406	112.40	2	0	2	5380	111.86	2	0	2	5174	107.56	2	0	2
	65	75mA	65.1	5C	7105	109.14	2	0	2	7071	108.61	2	0	2	6799	104.44	2	0	2
				5QW	6911	106.16	2	0	1	6878	105.65	2	0	1	6613	101.58	2	0	1
				ASY	5608	86.14	1	0	2	5581	85.73	1	0	2	5366	82.43	1	0	2
				5RW	6758	103.81	2	0	2	6726	103.31	2	0	2	6467	99.34	2	0	2
	85	100mA	87.2	5C	9473	108.63	2	0	2	9428	108.11	2	0	2	9065	103.96	2	0	2
				5QW	9214	105.67	2	0	1	9170	105.16	2	0	1	8818	101.12	2	0	1
				ASY	7477	85.75	1	0	2	7441	85.33	1	0	2	7155	82.05	1	0	2
				5RW	9011	103.33	2	0	2	8967	102.84	2	0	2	8623	98.88	2	0	2
560	100	55mA	93.2	5C	11090	118.99	4	0	3	11037	118.42	4	0	3	10612	113.86	4	0	3
				5W	10788	115.75	4	0	3	10736	115.19	4	0	3	10323	110.76	4	0	3
	120	65mA	110.9	5C	13012	117.33	4	0	3	12950	116.77	4	0	3	12451	112.28	4	0	3
				5W	12657	114.13	4	0	3	12597	113.59	4	0	3	12112	109.22	4	0	3
	140	75mA	128.5	5C	14786	115.07	4	0	3	14715	114.52	4	0	3	14149	110.11	4	0	3
				5W	14383	111.93	4	0	3	14315	111.40	4	0	3	13764	107.11	4	0	3

Notes:

\* Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown. Actual performance may differ as a result of end-user environment, application and inherent performance tolerances of the electrical components.

## ELECTRICAL DATA

# OF LEDs	INPUT VOLTAGE (V)	CURRENT (Amps)	SYSTEM POWER (w)
30	120	0.26	31
	208	0.15	
	240	0.13	
	277	0.11	
	347	0.09	
	480	0.06	
50	120	0.40	48.1
	208	0.23	
	240	0.20	
	277	0.17	
	347	0.14	
	480	0.10	
65	120	0.40	65.1
	208	0.23	
	240	0.20	
	277	0.17	
	347	0.14	
	480	0.10	
85	120	0.73	87.2
	208	0.42	
	240	0.36	
	277	0.31	
	347	0.25	
	480	0.18	
100	120	0.78	93.2
	208	0.45	
	240	0.39	
	277	0.34	
	347	0.27	
	480	0.19	
120	120	0.92	110.9
	208	0.53	
	240	0.46	
	277	0.40	
	347	0.32	
	480	0.23	
140	120	1.07	128.5
	208	0.62	
	240	0.54	
	277	0.46	
	347	0.37	
	480	0.27	

## PROJECTED LUMEN MAINTENANCE

AMBIENT TEMP.	0	25,000	TM-21-11 36,000	50,000	100,000	Reported L70 (HOURS)	Calculated L70 (HOURS)
25°C / 77°C	1.00	0.97	0.95	0.94	0.89	>60,000	>266,000
40°C / 104°C	0.99	0.96	0.94	0.93	0.85	>60,000	>211,000

AMBIENT TEMPERATURE		LUMEN MULTIPLIER
0°C	32°F	1.03
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98
50°C	122°F	0.97




Use these factors to determine relative lumen output for average ambient temperatures from 0–25°C (32–122°F)

# SRT2 EDGE-LIT

CEILING/SURFACE/GARAGE

## DIMENSIONS

### SRT2

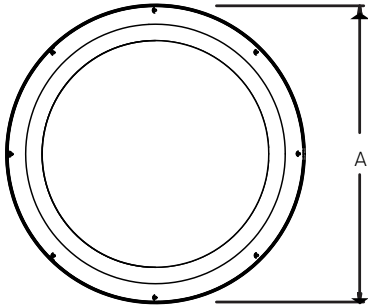

SRT2 with NX Distributed Intelligence™

A	B	C	Weight
18.5" (469mm)	4.0" (1mm)	5.2" (132mm)	15bs (6.8kg)

## ADDITIONAL INFORMATION

### MOUNTING



Surface Mount

Mounting plate with "quick mount" hanger for one person simple installation. (conduit not included)



Pendant Mount


Standard 3/4" threaded entry for pendant applications. (conduit not included)



Trunnion/Yoke Mount


Multiple position trunnion mount adjusts 9" up and down for positioning in 1" increments. (conduit not included)

### ACCESSORIES AND SERVICES

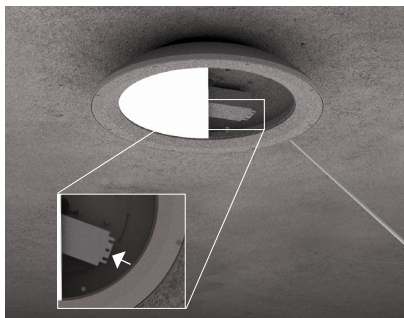

Battery Backup

Integral battery backup option available on SRT2 version. (conduit not included)

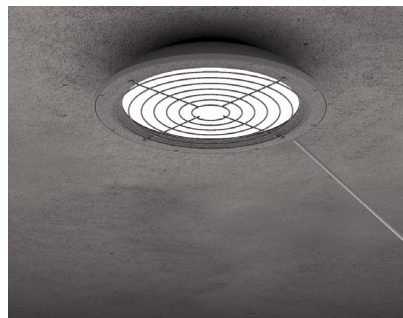

Wire Guard

An optional wire guard can be specified at the factory or as an accessory for field installation. (conduit not included)



Bird Deterrent

An optional bird shroud deterrent can be specified at the factory or as an accessory for field installation. (conduit not included)




# SRT2 EDGE-LIT

CEILING/SURFACE/GARAGE


## ADDITIONAL INFORMATION CONTINUED

### UPLIGHT


Optional uplight module provides 800 lumens of indirect illumination for improved visual quality while eliminating cave effect.

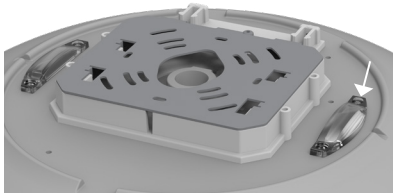

### CONTROLS

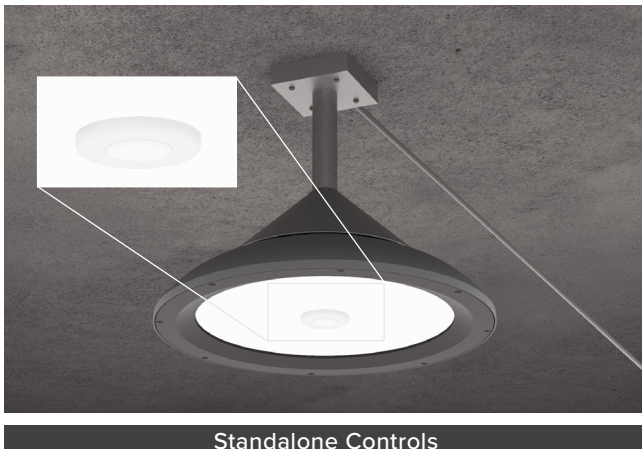

Optional passive infrared sensors are available for basic occupancy and daylight sensing. Programmable via remote or Bluetooth® phone app. (conduit not included)



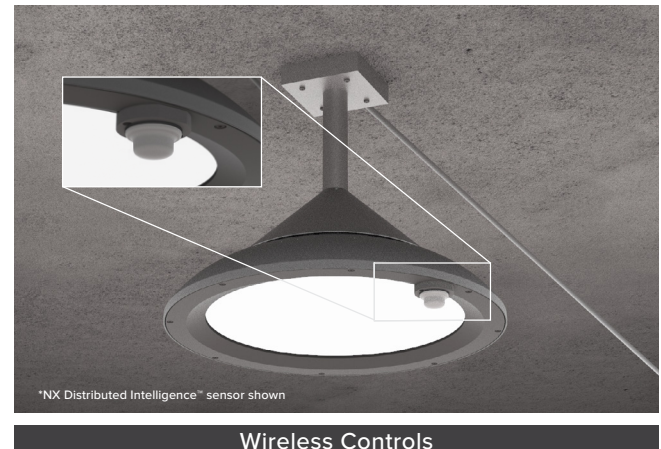


**NX DISTRIBUTED INTELLIGENCE™**

**wiSCAPE™**  
WIRELESS OUTDOOR LIGHTING SYSTEM

Optional NX Distributed Intelligence™ and wiSCAPE® wireless controls are available for SRT2 versions (with or without occupancy sensing). (conduit not included)

### SCP-8F

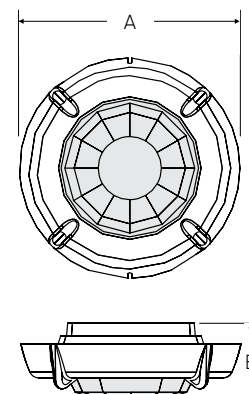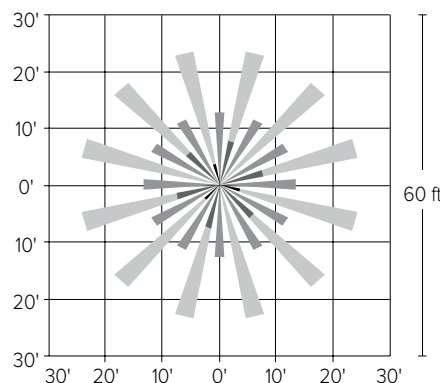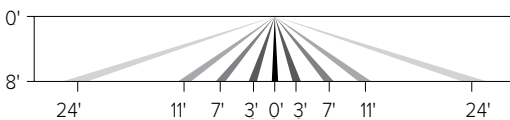

A	B
2.3" (59mm)	.8" (20mm)


# SRT2 EDGE-LIT

CEILING/SURFACE/GARAGE


## ADDITIONAL INFORMATION CONTINUED

### CONTROLS (CONT'D)

#### SCP-20F

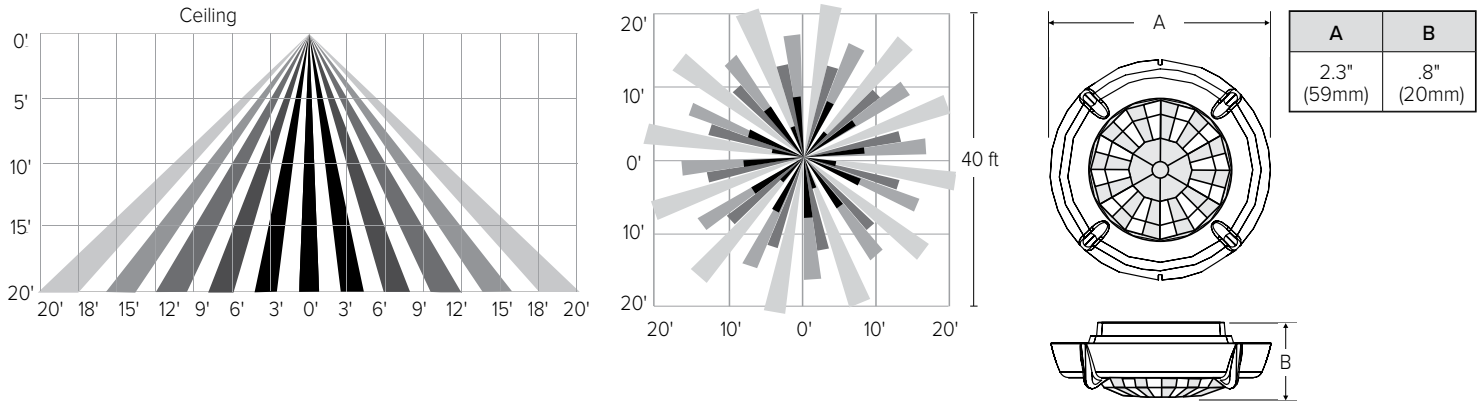

#### NXOS12F

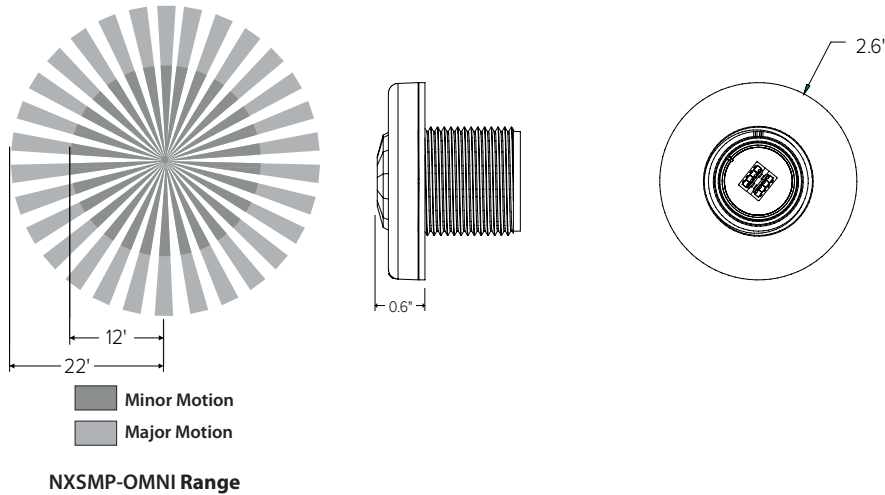

## USE OF TRADEMARKS AND TRADE NAMES

All product and company names, logos and product identifies are trademarks ™ or registered trademarks ® of Hubbell Lighting, Inc. or their respective owners. Use of them does not necessarily imply any affiliation with or endorsement by such respective owners.