

PowerHUBB™ Power/Control Node







Product Features

- · Replaces standard electronic AC driver in luminaire
- · Programmed for optimized performance of LED
- · Bi-directional communication
- Node is discovered immediately by Gateway software
- Low voltage inputs for control devices
- Provides dimming function down to 1%
- Direct connection to PSE device (PoE switch or midspan)
- · Master nodes are DHCP-enabled
- · Suitable for indoor applications
- · Class 2 electrical device
- · Plenum Rated
- Made in the USA



The Hubbell Control Solutions' (HCS) PowerHUBB node provides power distribution architecture and data connectivity to create a fully functioning Power over Ethernet (PoE) lighting control system. The PowerHUBB node implements a simplistic solution to controls by replacing the driver component and distributing direct control to the luminaire, achieving optimized power consumption.

Programming is performed using the Gateway software, which communicates bi-directionally over a Cat5e/6 Cable that connects directly to the PowerHUBB node. Master Nodes receive data and power from the PoE network switch. These nodes then pass along the power and data downstream to any daisychained Satellite node(s). Connected nodes/luminaires are automatically discovered by the Gateway, expediting commissioning and administering immediate feedback. Each Master node is DHCP-enabled and will automatically receive an IP address from the local network to simplify installation and setup.

Satellite Nodes extend the functionality and reach of a Master node by allowing Satellite nodes to be connected in a daisy-chain manner from the Master node via common Ethernet patch cables.


Compliance and Certification








Dimensional Data

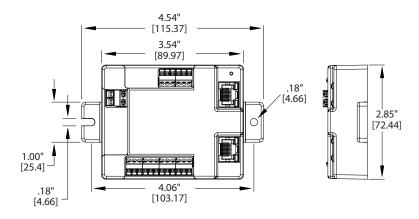

Ordering Information (Example: PHM1PC-100-1C-IND-1W1001)




¹True values are dependent on LED board and lumen package desired to be coordinated prior to ordering. Please replace xxxx with desired mA programmed value in increments of 10 starting at 100 to 1750.






Wiring Diagrams

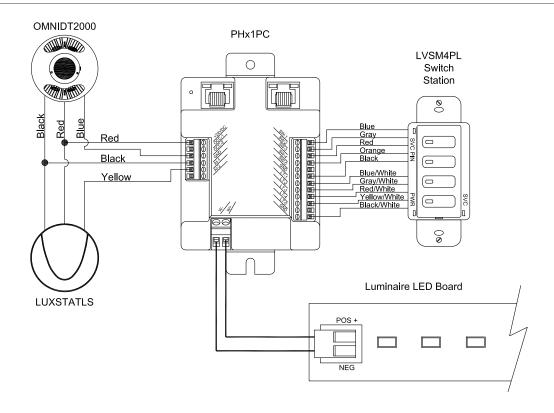

PowerHUBB Master Node with Occupancy Sensor, Daylight Sensor and Low Voltage 4 Button Switch Station

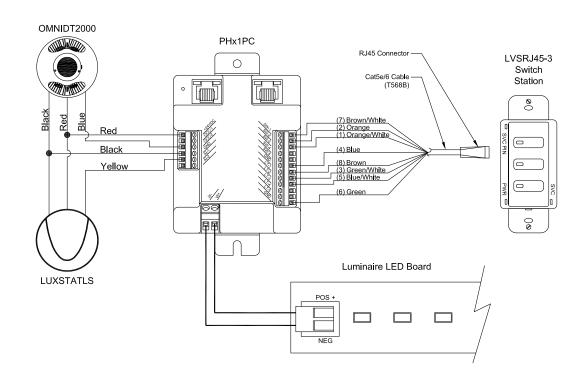


PowerHUBB Master Node with Occupancy Sensor, Daylight Sensor and Low Voltage, 3 Button, RJ45 Enabled Switch Station




Operating Window

Figure 1 shows the recommended output voltage and current ranges from the PowerHUBB Master and Satellite Nodes based on the specified node ambient temperatures. Driver performance cannot guarantee outside the operating window.

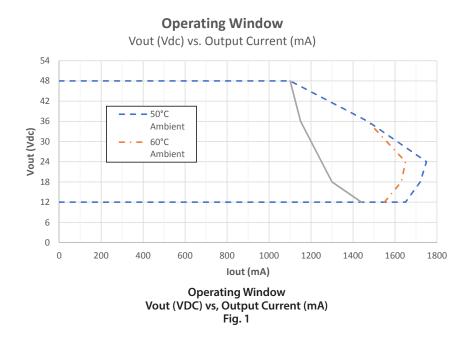

Driver Efficiency vs. Load Level

Figure 2 shows typical driver efficiency values for the full range of supported load voltages

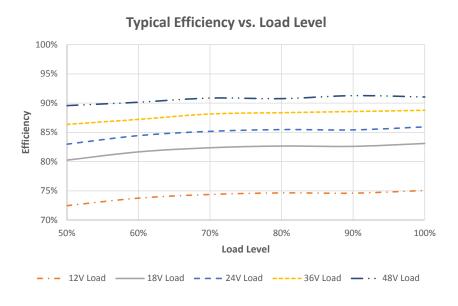


Typical Efficiency vs. Load Level Fig. 2



Output Current vs. Load Voltage


Figure 3 shows the maximum recommended output current settings based on load voltage and ambient temperature.

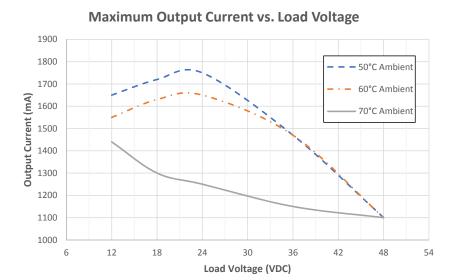

Maximum Output Current vs Load Voltage Fig. 3

Output Power vs. Load Voltage

Figure 4 shows the maximum recommended output power level based on load voltage and ambient temperature.

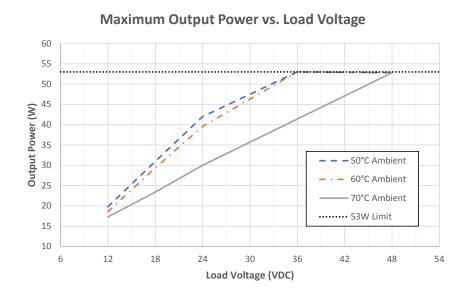

Maximum Output Power vs. Load Voltage Fig. 4



Remote Mounting

Applications that call for remote mounting of the PowerHUBB nodes separate from the LED luminaire are acceptable. Please follow the maximum wiring distances listed in the table below when selecting an appropriate wire gauge.

Remote Mounting		AWG WIRE SIZES						
		12	14	16	18	20	22	
OUTPUT CURRENT (mA)	350	900	566	356	224	141	89	
	500	630	396	249	157	99	62	
	700	450	283	178	112	70	44	
	100	315	198	125	78	49	31	
	1100	286	180	113	71	45	28	
	1400	225	141	89	56	35	22	
	1750	180	113	71	45	28	18	

Max allowed distance between node and LED module in feet (Based on 1V drop)

General Specifications

	PoE Interface(Master node only):	IEEE 802.3at-2009 PD Type 2, Class 4, Compliant Input with LLDP extensions for negotiating power above 30W using 4 pairs		
	Input:	48-57VDC		
	Peak operating power:	60W		
Electrical	Nominal standby power:	2.0W		
	PoE input connection:	Unshielded female RJ45 jack for use with Cat5e/6 cable to PSE device		
	BUS connections:	Unshielded female RJ45 jack for use with Cat5e/6 cable to PowerHUBB Master or Satellite node		
	Device type:	Class 2 electrical device		
	Output channel:	Single LED driver channel		
	Driver design:	Constant current LED driver design, programmable in 10mA increments from 100mA to 1750mA (Refer to Fig. 1)		
	Dimming:	Full range 1% to 100% dimming control in 1% increments via CCR, PWM or Hybrid mode		
LED Driver Outputs	Output voltage range:	12VDC - 48VDC		
	Rated output power:	53W max		
	Protection:	Short circuit and open circuit protection		
	Connections:	Screw terminals; accept 14-26 AWG conductors. Tightening torque: 2.0-3.5 in-lbs. (0.35-0.4 Nm)		
	Power supply:	One +24VDC terminal for powering external sensors, 500mA total capacity		
Sensor I/O	Occupancy sensor input:	OCC-1 for dry-contact sensor signals and OCC-2 for 24VDC Active-Hi sensor signals		
Connections	Analog sensor Inputs:	Two 0-10VDC analog sensor inputs		
	Connections:	Screw terminals accept 16-26 AWG conductors. Tightening torque: 2.0-2.2 in-lbs. (0.23-0.25 Nm)		
	Switch inputs:	Five momentary dry contact pushbutton inputs		
Wall Switch	Pilot light outputs:	Five pilot light outputs, rated for 24VDC@7.5mA each		
Connections	Connections:	Screw terminals accept 16-26 AWG conductors. Tightening torque: 2.0-2.2 in-lbs. (0.23-0.25 Nm)		



General Specifications

	Far in dear was and		
	For indoor use only		
	IP Rating	IP20	
	Sound Rating	<24dB Class A	
Environment	Maximum case temperature:	185°F (85°C)	
	Operating temperature:	32°F to 158°F (0°C to 70°C)	
	Operating humidity:	10% to 80% RH non-condensing	
	Storage temperature:	-4°F to 185°F (-20°C to 85°C)	
	Storage humidity:	5% to 95% RH non-condensing	
Mounting	Mounts inside Fixture can be mounted remotely. (see remote mounting chart)		
Dimensions-Overall	4.54" (115mm) L x 2.87" (73mm) W x 1.10" (28mm) H		
Dimensions- Mounting Tabs Removed	3.54" (90mm) L x 2.87" (73mm) W x 1.10" (28mm) H		
Color	Black		
	Safety standards:	UL 2108, CAN/CSA C22.2 No. 9	
		UL 1598C, CAN/CSA C22.2 No. 250.0-08, CSA B-79A	
		UL 2043, Suitable for Use in Air Handling Spaces (Plenum Rated)	
Safety & EMC	EMC emissions:	Compliance to EN 55015:2013	
	EMC immunity:	Compliance to EN 61547:2009	
	FCC:	Compliance to Title 47 Part 15 Subpart B Section 15.109	
	EU:	RoHS Compliant	
Rated Lifetime	50,000+ hours		
Origin	Made in the USA		
Warranty	Five year limited		



