

RECEPTACLES

ACCEPTOR® SERIES



UGFI GROUND FAULT PROTECTOR

ACCEPTOR®



Adapter Unit

UL LISTED File No. E91049

CSA US Certified File No. LR14667

FEATURES-SPECIFICATIONS

Adapter Unit

- No need to permanently alter existing installations; **Portable Unit** can be temporarily hung using included strap near an existing receptacle wherever protection is required
- Factory Sealed Unit
- Acceptor® plug and cord set included with **Adapter Unit**. Cord is 36"

Hard-Wired Unit

- provides GFCI and circuit protection in new installations, or as an upgrade or replacement for non-GFCI receptacles
- Factory Sealed, except Group B

Adapter and Hard-Wired Unit

- GFCI device also provides circuit protection, for connected apparatus, against current overload and short circuits
- Acceptor® receptacles and plugs are interchangeable with both Crouse-Hinds® Ark-Gard® 2 and Appleton® U-Line® products
- Amber pilot light provides indication that the receptacle is energized.
- Units can be **Padlocked OFF** for maintained safety
- Fully gasketed GFCI compartment prevents moisture from damaging electronic components
- Same high quality materials as the standard ACCEPTOR®

- Hard-Wired assemblies in Group B areas require sealing within 6" of enclosure.
- 125VAC & 250 VAC devices are CCSAUS certified; 125VAC devices are also UL Listed.
- 2P 250V units are for 2 "hot line" applications and include 2P 5mA GFI breakers. 2P Units are for 120/240V or 120/208Y Grounded Power Supply Systems ONLY. **Do NOT use with Delta supply systems.**

Ark-Gard® is a registered trademark of Crouse-Hinds®
U-Line® is a registered trademark of Appleton Electric Company®.

- Adapter Unit**
Class I, Div. 2, Groups B, C, D
Class I, Zone 2, Groups IIB+H₂, IIA
Class II, Div. 1 & 2, Groups F, G
Class III, Div. 1 & 2
- Hard-Wired Unit**
Class I, Div. 1 & 2, Groups B, C, D
Class I, Zones 1 & 2, Groups IIB+H₂, IIA
Class II, Div. 1 & 2, Groups F, G
Class III, Div. 1 & 2

NEMA 3 ENCLOSURE TYPE
(Adapter or Hard-Wired units)


GFCI RECEPTACLE ADAPTER (W/CORD SET)

20A 125V ②	UGFI20AD	 5-20R
15A 125V ②	UGFI15AD	 5-15R
20A 250V ②③	UGFI202AD	 6-20R
15A 250V ②③	UGFI152AD	 6-15R

HARD WIRED (PERMANENTLY MOUNTED) GFCI RECEPTACLE


20A 125V ②	 5-20R	1/2" HUB 3/4" HUB 1" HUB	UGFI20C1 UGFI20C2 UGFI20C3
15A 125V ②	 5-15R	1/2" HUB 3/4" HUB 1" HUB	UGFI15C1 UGFI15C2 UGFI15C3
20A 250V ②③	 6-20R	1/2" HUB 3/4" HUB 1" HUB	UGFI202C1 UGFI202C2 UGFI202C3
15A 250V ②③	 6-15R	1/2" HUB 3/4" HUB 1" HUB	UGFI152C1 UGFI152C2 UGFI152C3

Hard-Wired Unit

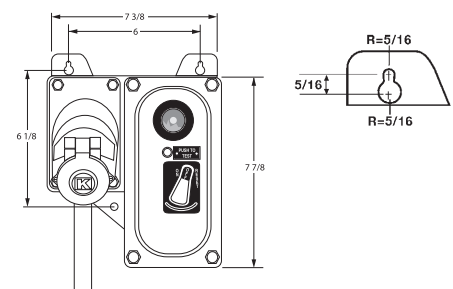

The GFCI protected ACCEPTOR® is the solution to OSHA's requirements for GFCI protection when using portable equipment in hazardous and wet locations. For use with 125V, or 125/250V③ 15 or 20 amp receptacles without GFCI protection, the **Adapter Unit** provides GFCI and circuit protection to connected apparatus by simply being plugged into an existing receptacle.

The **Hard-Wired Unit** provides the same protection and is used directly as a GFCI protected device. Units are feed-through with one close-up plug.

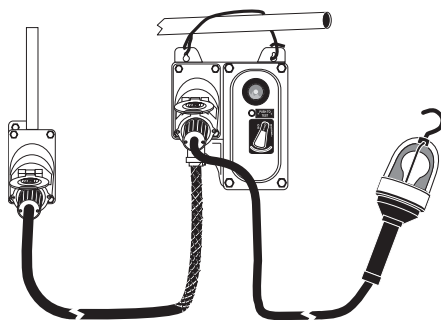

Typical Application with XHL Series Hand Lamp