

Portal LED

Flush-Mount Mounted • Damp Location Listed **PROGRESS LED**

Description:

Portal Collection One-Light 13" LED Flush Mount

Specifications:

- White Acrylic Diffuser
- Dimmable to 10% brightness (See Dimming Notes)
- Chassis covers a standard 4" recessed outlet box: 11.9375 in W., 0.375 in ht., 11.9375 in depth
- Mounting strap for outlet box included
- 6 in of wire supplied

Performance:

Number of Modules	1
Input Power	29 W
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	2,197/75.8 (LM-82)
Lumens/LPW (Delivered)	875/30.1 (LM-79)
CCT	3000 K
CRI	90+ CRI
Life (hours)	60000 (L70/TM-21)
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Max. Operating Temp	30 °C
Warranty	5-year Limited Warranty
Labels	cCSAus Damp Location Listed

P3632-0930K9



Dimensions:

Diameter: 13 in
 Height: 2-1/2 in

White Acrylic Diffuser
 Diameter: 12 in
 Height: 0-1/16 in



P3632-0930K9

Photometrics:

ELECTRICAL DATA	P3632-0930K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.242 A
Power Factor	Greater than 0.90
THD	<20%
EMI/RFI	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P3632-0930K9


LED Light Engine: 3000 K 90+
 System Wattage: 29
 Fixture delivered lumens: 875
 Fixture Efficacy: 30.1
 Spacing Criteria: 1.27

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	303	
5	301	29
15	291	82
25	272	125
35	243	152
45	207	159
55	163	146
65	113	112
75	59	63
85	11	14
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	236	26.8
0-40	389	44.1
0-60	694	78.6
0-90	882	100.0
90-180	0	0.0
0-180	882	100.0

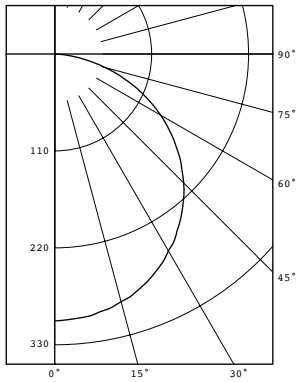

Test 17.00525 Test Date 02/17/17

P3632-0930K9

Dimming Notes:

P3632-0930K9 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls:

Lutron_Nova T NTELV-300

Lutron_Vierti VTELV-600

Lutron_Maestro MAELV-600

Lutron_spacer/system SPSELV-600

Leviton_Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation.

Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.