

Project:			
Fixture Type:			
Location:			
Contact:			

P8071-28-30K

P8071 SERIES

6IN LED New Construction and Remodel · Wet location listed





Description:

The P8071 is ideal for use in both new construction as well as remodel/retrofit. Light output is comparable to that of a typical 65W incandescent downlight, providing up to 75% energy savings. The P8071 is equipped with both Edison base adapter and quick link connector allowing easy installation in many standard incandescent recessed housings.

Specifications:

- Available in White, Bronze, Black and Brushed Nickel
- Diffused polycarbonate lens controls direct glare from the LEDs
- Easy "Push and Twist" installation with (3) friction spring clips
- Can be installed in most competitors 6" recessed housings
- · Dimmable to 10% with many Triac/Forward Phase dimmers
- Suitable for use in IC or NON-IC Applications
- · Provided with quick link for use with E26 Edison Base adapter
- · Meets California Title 24 JA8 2016.
- · ENERGY STAR® qualified




Performance:

Input Power	10.5w	
Input Voltage	120 V	
Input Frequency	60 Hz	
Lumens/LPW	725/69 (LM-79)	
CCT	3000 K	
CRI	90	
Life (hours)	50,000 (L70/TM-21)	
EMI/RFI	FCC Title 47, Part 15 Class B	
Min. Start Temp	-30 °C	
Max. Operating Temp	30 °C	
Warranty	5 year warranty	
Labels	cCSAus Wet location listed	
	ENERGY STAR® qualified	
	Meets California Title 24 - JA8 - 2016	

Dimensions:

Images:

- (A) Outside Diameter: 7.75"
- (B) Height: 4"
- (C) Inside Diameter: 6.125"
- (D) Light Emitting Surface (LES): 2.75"






Finish Base 09 - Brushed Nickel

Color Temp 30K - 3000 K

BLANK - 90

CRI



28 - Satin White

31 - Black



P8071 SERIES 6IN LED New Construction and Remodel · Wet location listed



P8071-28-30K **Photometrics:**

ELECTRICAL DATA	P8071-28-30K	
Input Voltage	120 V	
Input Frequency	60 Hz	
Input Current	0.11 A	
Power Factor	>0.90	
THD	<20%	
EMI Filtering	FCC 47CFR	
	Part 15, Class B	
Operating Temperature	-30 °C to 30 °C	
Dimming	Yes*	
Overvoltage overcurrent short-circuit protected		


Over-voltage, over-current, short-circuit protected

P8161-28-30K

LED Light Engine: 3000 K, 90 CRI

System Wattage: 11 Fixture Delivered Lumens: 734

Fixture Efficacy: 66 Spacing Criteria: 1.0

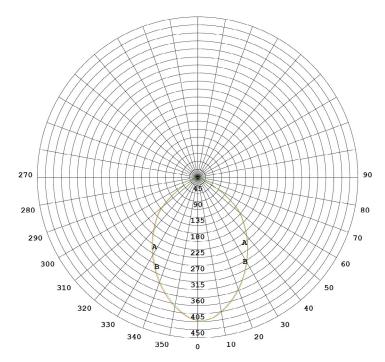

ZONAL LUMEN SUMMARY					
Zone	Zone Lumens	Total Lumens	% Luminaire		
0-10	42.29	42.29	5.76		
10-20	116.20	158.5	21.6		
20-30	160.9	319-5	43.5		
30-40	161.7	481.2	65.5		
40-50	121.6	602.7	82.1		
50-60	74.88	677.6	92.3		
60-70	37.69	715.3	97.4		
70-80	14.54	729.8	99.4		
80-90	4.22	734.1	100		
90-100	0.01	734.1	100		

^{*}See Dimming Notes for more information



P8071 SERIES

6IN LED New Construction and Remodel • Wet location listed



P8071-28-30K

Dimming Notes:

P8071 is designed to be compatible with many Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

Triac/Forward Phase Controls

Lutron AYCL-153P

Lutron TGCL-153P

Leviton 6672

Leviton 6674

Leviton 6681

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.