

P8241 Series

LED New Construction and Remodel • Wet Location



Specifications:

Description:

The P8241 delivers a solution for flush mount, for both residential and commercial markets. In addition, the P8241 is wet located and is a cost effective solution for fire rated application. The P8241 features a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits.

Construction:

- Diffused polycarbonate lens controls direct glare from the LEDs
- Simple snap in installation for J-Box
- Die-cast aluminum construction with a powder coat paint finish
- Can be installed in a 4" J-Box
- Lumen output and distribution comparable to a 65W incandescent lamp
- Suitable for use in IC or NON-IC Applications with 30°C (86°F) continuous room side ambient temperature.

Performance:

Input Power	10.5W
Input Voltage	120V
Input Frequency	60Hz
Lumens/LPW	680/65 (LM-79)
CCT	3000K
CRI	90+
Life	60,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class B
Min. Start Temp	-30° C
Max. Operating Temp	30° C
Warranty	5 yrs.
Labels	cCSAus classified for wet locations ENERGY STAR® qualified


P8241-20/30K9-AC1-L06

Images:




Dimensions:

A	B
5.25"	1.7"

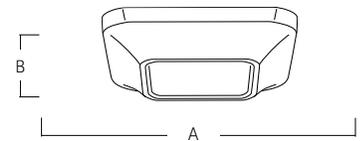

Included Mounting Options:

J-Box Mount with Quick-Link



J-Box
Adapter



Dimming Notes:

P8241-20/30K9-AC1-L06

P8241 is designed to be compatible with many Electronic Low Voltage (ELV-Reverse Phase) controls. LED rated dimmer controls may offer favorable dimming performance.

The following is a partial list of known compatible dimmer controls:

Electronic Low Voltage ELV Reverse Phase Controls

Leviton	Renoir II	AWRMG-EAW
Lutron	Diva Series	(Part Number DVELV-300)
Lutron	Maestro Series	(Part Number MAELV-600)
Lutron	Nova T Series	(Part Number NTELV-300)
Lutron	Spacer Series	(Part Number SPSELV-600)
Lutron	Vierti Series	(Part Number VTELV-600)

LED Rated Controls

Pass & Seymour	(Part Number DCL453PTCCCV6)
----------------	-----------------------------

Incandescent Digital type dimmers are not recommended.

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.