


PROTECTA III

EX e GRP LINEAR



When access is required the Protecta III features an easy access clamp bar and automatic lamp de-energisation to allow quick and easy re-lamping.

Mounting Options

- Ceiling
- Wall
- Suspended
- Pole






_		_	_	
D	rotocta	Ev o		luorescent

Type of Protection	Ex e mb q (Increased Safety, Encapsulation, Powder filling)			
ATEX Classification	Group II Category 2 GD			
Area Classification	Zone 1 and Zone 21 areas to EN 60079-10-1 and EN 60079- 10-2 with installation to EN 60079-14			
Certificate	EC Type Examination Certificate Baseefa04ATEX0220 IECEx Certificate of Conformity IECEx BAS09.0017			
	Ex e mb q IIC T4 Gb Ex tb IIIC T85°C Db IP66/67			
Enclosure	GRP body with polycarbonate cover			
Geartray	White polyester painted zinc coated steel			
Entry	4 x M20 cable entries - 2 at each end			
Termination	3 core 4mm² max conductor with looping and 16A rating through wiring (6mm² terminations available - / SC option)			
Installation	2 x M8 tapped Stainless steel moulded inserts located on rear of b			
Control Gear	High frequency			
Maintenance	Quick release diffuser clamp and hinged cover			
Ingress Protection	IP66/67 to EN 60529			
Surge Protection	6kV			
Electrical Supply	220-254V AC, 50/60Hz 220-300V dc			



- Full length easy access diffuser clamp
- Automatic de-energisation on opening
- Resistant to voltage fluctuations
- DTS-01 deluge tested
- Advanced control gear gives 50/60Hz Operation, High Power Correction Factor and Regulated Lamp Output that is 20% greater at -20°C than competitors
- IK10 Impact Protection





Eyebolt mounting assembly






Std. Cat No.	Lamp	Lamp Holder	LOR %	TClass	T°C (Dust)	Ambient °C	Weight
PRGE/218/BI	2x 18W	Т8	75	T4	85	-20 to +55	5.9kg
PRGE/236/BI	2x 36W	Т8	75	T4	85	-20 to +55	9.5kg

Options - Suffix to Catalogue No.						
/M25	M25 cable entries	/SE	Spigot entry			
/LBE	Looping both sides	/SC	Screwed connection terminal block (up to 6mm ² conductors)			
/EL	Extra live termination facility (to match emergency circuit)	/3P	3 phase termination facility (not available if looping requried)			
/120	Specific voltage (110-130V)					

Accessories Order Code Pole mounting bracket assembly (38/42 diameter poles) SPOL4-100001 Pole mounting bracket assembly (48/52 diameter poles) SPOL4-100002 SPOL4-100003 SPRO4-0005 SPRO4-0006 SPRO4-0002 Standard 2ft wall mounting outreach bracket (use with SPOL4-100001) NPRO4-0008 Standard 4ft wall mounting outreach bracket (use with SPOL4-100001) NPRO4-0012

SPRO5-0005

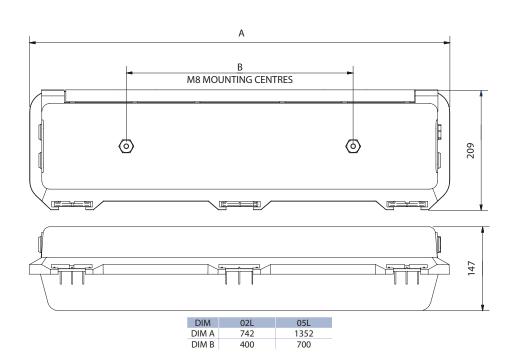

Chalmit PO BOX 5575 Glasgow G52 9AP Tel: +44(0) 141 882 5555 Fax: +44(0) 141 883 3704 Email: info@chalmit.com www.chalmit.com

are subject to change without notice. Please check the Chalmit www.chalmit.com





