H-MOSS[®] Controls Adaptive Passive Infrared Wall Switches Wall Switches





- · Built in photocell with manual super saver mode for daylight harvesting
- No neutral required
- Auto or manual "ON" operating modes. Available in either single relay or dual relay versions
- Designed for use on 120 or 277V AC circuits. No neutral needed for fast retrofits

Ordering Information

Description	Device Color	UPC Number	Catalog Number
Passive infrared,	White	783585413594	AP2000W1
Single Circuit, 1 button for manual/auto control			

Listings

cULus Listed Meets ASHRAE 90.1 CEC Title 24 Certified

Specifications

Housing	High impact plastic (UL-94-5V)
Mounting Strap	Plated steel
Lens	Dual element pyrometer and 12 element cylindrical hard lens
Sensing Indicator	Passive Infrared, Red LED

Performance

Elect	rical
Load	Capacity

Incandescent - 0 to 800 watts, 120V AC Ballast - 0 to 1000 watts, 277V AC Ballast 0 to 1800 watts 120/277V AC, 50/60Hz

Power Supply Mechanical Wire Leads

#18 AWG stranded wire, 6" long with 1/2" stripped ends

Environmental


Operating Temperature 32° F to 104°F (0°C to 40°C); 0% to 95% non-condensing relative humidity Controls Ambient Light Adjustable ambient light override, 10 to 500 foot candles

Front Press Switch Auto/Manual "ON" operating mode Sensitivity Adaptive 0% to 100% Time Delay Digital, adaptive 4 to 30 minutes, 20 minutes default

Coverage Pattern

Area	1000 square foot. Area of coverage based on minor motion
	pattern. See illustration.
Mounting Height	42 to 54 inches above floor



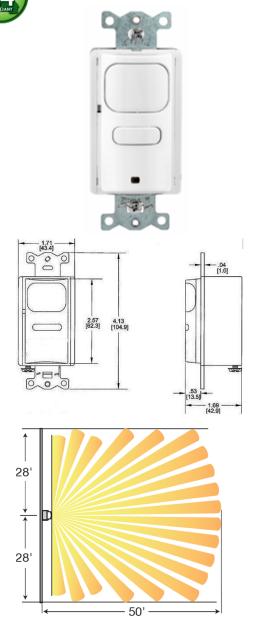

Minor Motion: 🔤 Ultrasonic 📒 PIR Major Motion: Ultrasonic PIR

Complementary Products

Wallplate NP26W, SS26, RCW1W

Online Resources

Customer Use Drawing eCatalog Installation Instructions



Wiring Device-Kellems