
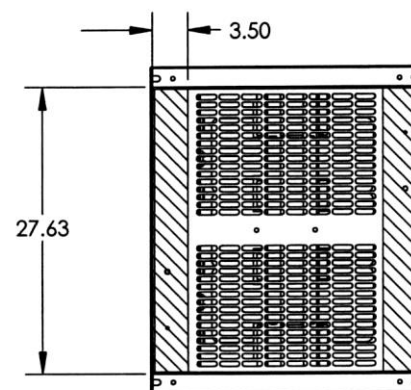
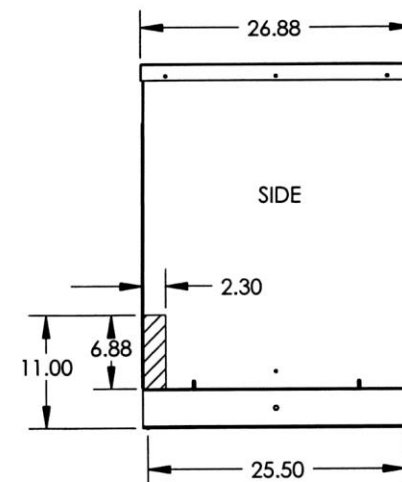


Primary Volts	Connect Primary Lines To	Inter-Connect	Connect Secondary Lines To
216	H1-H4	H1, H3, 8 & H2, H4, 1	
228	H1-H4	H1, H3, 7 & H2, H4, 2	
240	H1-H4	H1, H3, 6 & H2, H4, 3	
252	H1-H4	H1, H3, 5 & H2, H4, 4	
432	H1-H4	H2, 1 & H3, 8	
444	H1-H4	H2, 2 & H3, 8	
456	H1-H4	H2, 2 & H3, 7	
468	H1-H4	H2, 3 & H3, 7	
480	H1-H4	H2, 3 & H3, 6	
492	H1-H4	H2, 4 & H3, 6	
504	H1-H4	H2, 4 & H3, 5	
<b>Secondary Volts</b>			
240		X2 to X3	X1-X4
120/240		X2 to X3	X1-X2-X4
120		X1 to X3 X2 to X4	X1-X4

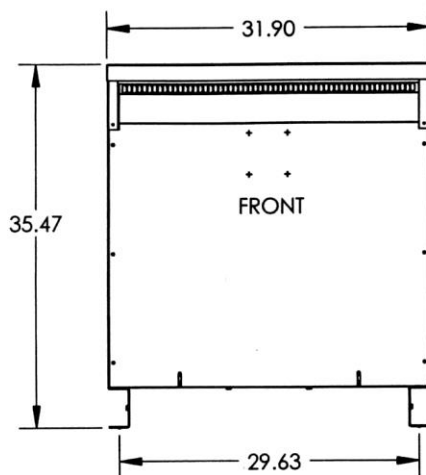

NOTE:  
PRIMARY AND SECONDARY BUS AREA  
IN FRONT OF CASE.

KEY: DENOTES CONDUIT AREAS

## Revisions

ACME ELECTRIC

Type No.

DRAWN:

DATE: June 24, 2015

**CASE 3**

KVA	CATALOG NUMBER	VOLTAGE		WEATHER SHIELD	WEIGHT	PHASE	FREQ.
		HIGH	LOW				
75	<b>TP530213S</b>	240 x 480	120/240	WS-A-3	440 Lbs	1 $\phi$	60 Hz

Winding Rise:	150°C
Insulation:	220°C
Sound Level:	50db

### TYPICAL PERFORMANCE DATA

Regulation @ 100% PF:	2.76%
Standards:	DOE 2016

Windings:	AL
Impedance:	6.67%

Typical Efficiency:	98.67%
No Load Losses:	172 W
Full Load Losses:	2,175 W

Meets DOE 2016 Efficiency

Control  
7

MX