
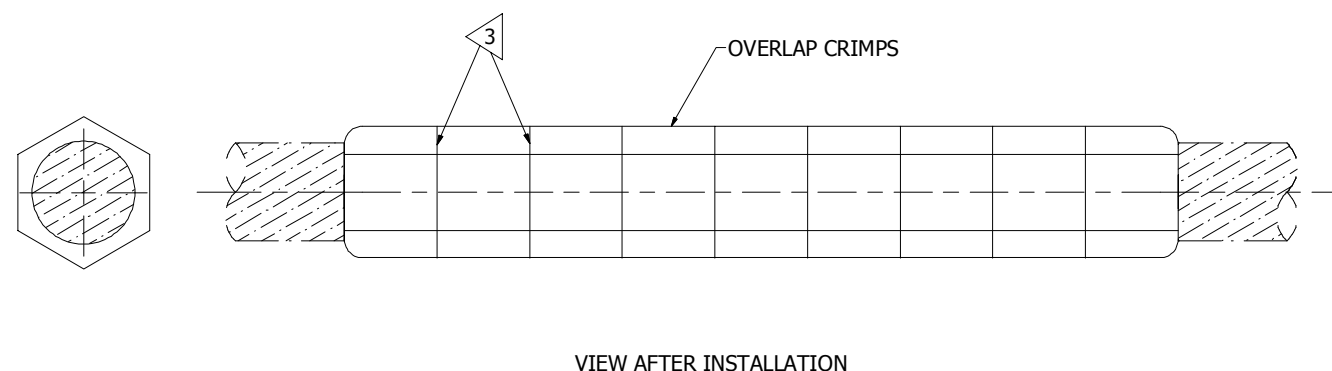


REPAIR SLEEVE, ACSS												
ACSS CONDUCTOR				CATALOG NUMBER	ITEM NUMBER	L in [mm]	O.D in [mm]	INSTALLATION TOOLING				
NAME	Kcmil	STRANDS	DIAMETER in [mm]					BURNDY HYPRESS & DIE SET		T&B DIES FOR 21940 TYPE PRESS	BURNDY DIES TO FIT ACA PRESS	
								DIE INDEX	Y60B		ACA PRESS 150B	ACA PRESS H2H
LINNET	336.4	26/7	0.720 [18]	YNU32RHT	30011059	22.00 [559]	1.19 [30]	717	L717	96	M717	H717
ORIOLE	336.4	30/7	0.741 [19]					719	L719	106	M719	H719
IBIS	397.5	26/7	0.783 [20]					720	L720	115	M720	H720
FLICKER	477	24/7	0.846 [21]	YNU36RHT	30011061	22.00 [559]	1.41 [36]	722	L722	125	M722	H722
HAWK	477	26/7	0.858 [22]					724	L724	140	M724	H724
PARAKEET	556.5	24/7	0.914 [23]					725	L725	150	M725	H725
DOVE	556.5	26/7	0.927 [24]	YNU39RHT	30011062	24.00 [610]	1.50 [38]	727	L727	161	M727	H727
PEACOCK	605	24/7	0.953 [24]					728	L728	189	M728	H728
SQUAB	605	26/7	0.966 [25]					729	L729	204	M729	H729
ROOK	636	24/7	0.977 [25]	YNU43RHT	30011063	24.00 [610]	1.61 [41]	735	L735	212,214	M735	H735
GROSBEAK	636	26/7	0.991 [25]					735	L735	214	M735	H735
FLAMINGO	666.6	24/7	1.000 [25]					735	L735	214	M735	H735
STARLING	715.5	26/7	1.051 [27]	YNU451RHT	10106003	24.00 [610]	1.80 [46]	735	L735	214	M735	H735
CUCKOO	795	24/7	1.092 [28]					735	L735	214	M735	H735
DRAKE	795	26/7	1.107 [28]					735	L735	214	M735	H735
TERN	795	45/7	1.063 [27]	YNU49RHT	30011064	24.00 [610]	1.97 [50]	735	L735	214	M735	H735
CONDOR	795	54/7	1.092 [28]					735	L735	214	M735	H735
RUDDY	900	45/7	1.131 [29]					735	L735	214	M735	H735
RAIL	954	45/7	1.165 [30]	YNU54RHT	30011065	24.00 [610]	2.25 [57]	735	L735	214	M735	H735
CARDINAL	954	54/7	1.196 [30]					735	L735	214	M735	H735
ORTOLAN	1033.5	45/7	1.212 [31]					735	L735	214	M735	H735
CURLEW	1033.5	54/7	1.245 [31]	YNU56RHT	30011066	27.00 [686]	2.50 [64]	735	L735	214	M735	H735
BLUEJAY	1113	45/7	1.258 [32]					735	L735	214	M735	H735
FINCH	1113	54/19	1.292 [33]					735	L735	214	M735	H735
BUNTING	1192.5	45/7	1.302 [33]	YNU58RHT	30011067	27.00 [686]	2.50 [64]	735	L735	214	M735	H735
BITTERN	1272	45/7	1.345 [34]					735	L735	214	M735	H735
PHEASANT	1272	54/19	1.381 [35]					735	L735	214	M735	H735
DIPPER	1351.5	45/7	1.386 [35]	YNU59RHT	30011068	27.00 [686]	2.50 [64]	735	L735	214	M735	H735
MARTIN	1351.5	54/19	1.424 [36]					735	L735	214	M735	H735
NUTHATCH	1510.5	45/7	1.465 [37]					735	L735	214	M735	H735
PARROT	1510.5	54/19	1.505 [38]									
LAPWING	1590	45/7	1.504 [38]									
FALCON	1590	54/19	1.544 [39]									
CHUKAR	1780	84/19	1.601 [41]									
BLUEBIRD	2156	84/19	1.762 [45]									
KIWI	2167	72/7	1.735 [44]									

REV	DATE	DESCRIPTION	ECO	BY	C'H'K.
A	05/28/2013	CREATE SALES DOCUMENT FOR ACSS REPAIR SLEEVE (CAT.# YNU-RHT)	31866	SP	PW

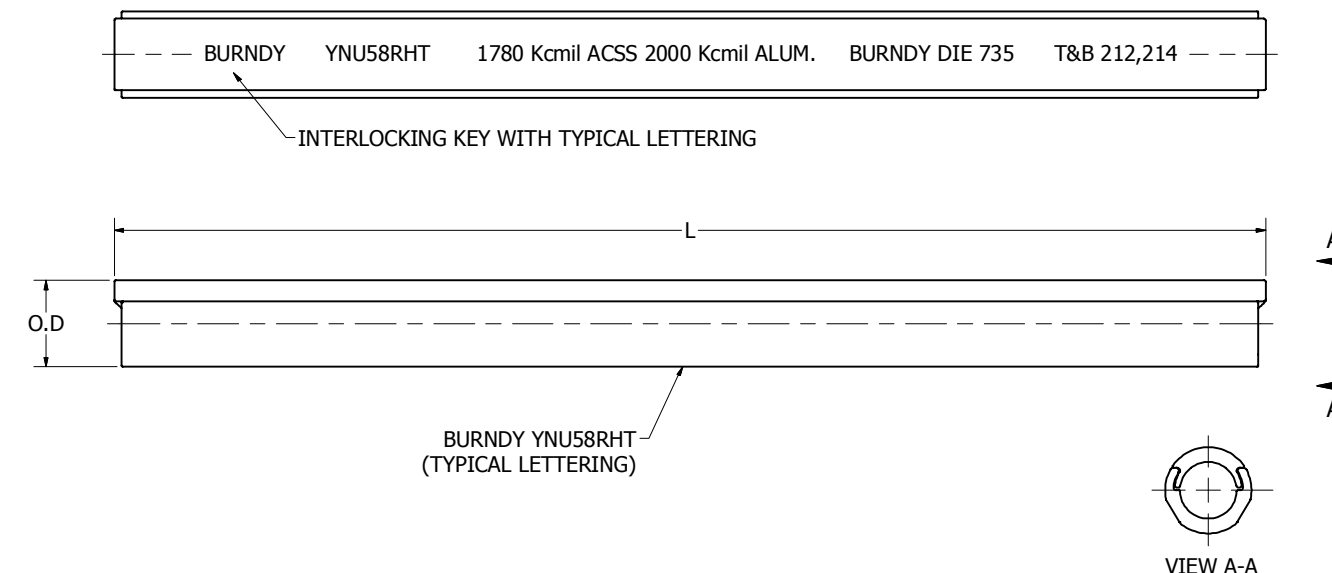

2

NOTES:

- DIMENSIONS IN BRACKETS [ ] ARE IN MILLIMETERS ROUNDED OFF TO THE NEAREST MILLIMETER, UNLESS OTHERWISE SPECIFIED AND ARE FOR REFERENCE ONLY.
- THE EQUIVALENT T&B DIE INDEXES ARE LISTED FOR YOUR CONVENIENCE.
- FLASH FORMED DURING CRIMPING SHOULD BE REMOVED BY FILING AND SHARP EDGES ROUNDED OFF.
- CONNECTOR IS INDIVIDUALLY PACKAGED AND SEALED IN POLY TUBE.
- MATERIAL: ALUMINUM
- INSTALLATION INSTRUCTION IS DRAWING NO. 50025597 (FORM50024018)
- PENETROX™ PENHT IS REQUIRED FOR INSTALLATION. PENETROX™ PENHT IS NOT PROVIDED WITH THE CONNECTOR AND IS PURCHASED SEPARATELY.
- INSTALLATION TOOLING IS NOT INCLUDED, AND IS PURCHASED SEPARATELY.

TO ORDER BURNDY® PRODUCTS CALL		REPAIR SLEEVE, ACSS	
UNITED STATES 1-800-346-4175 (LONDONDERRY, NH)		ITEM NO: SEE TABLE CAT. NO: YNU-RHT (SEE TABLE)	
CANADA: 1-800-361-6975 (QUEBEC) 1-800-387-6487 (ALL OTHER PROVINCES)		DRAWN BY: S Pandian 5/29/2013 CHECKER: M Mohan 5/29/2013 DSN APRVL: P Waltz 6/6/2013 MFG APRVL: -- QA APRVL: C ACKERMAN 6/18/2013 MKT APRVL: B CRUTCHER 6/6/2013	
FOR PRODUCT INFO: <a href="http://www.burndy.com">http://www.burndy.com</a>			
PROJECT #:	SIZE	DRAWING NO	REV
DOCUMENT TYPE: SALES	D	50025987	A
REL LEVEL: Released		SHEET 1 OF 1	