


- NOTES:
1. HOT DIP GALVANIZE PER ASTM A153.
 2. DIMENSIONS IN INCHES
 3. WEIGHT— 1.60 LBS.
 4. SHIP ASSEMBLED AS SHOWN.
 5. RECOMMENDED TORQUE 480 LB-INCHES

ITEM NO.	PART NO.	DESCRIPTION	MATERIAL	QTY
1	M-7620	HEX. CLEVIS PIN	GALV. STEEL	1
2	PP-25408	CLAMP BODY	GALV. DUCTILE IRON	1
3	M-1314-1	COTTER PIN	STAINLESS STEEL	1
4	BOLT	1/2"-13X2 CARRIAGE BOLT	GALV. STEEL SAE GR.2	1
5	P-25407	REVERSIBLE KEEPER	GALV. DUCTILE IRON	1
6	WASHER	1/2"-STD LOCKWASHER	GALV. STEEL	1
7	NUT	1/2"-13 FIN. HEX.	GALV. STEEL	1

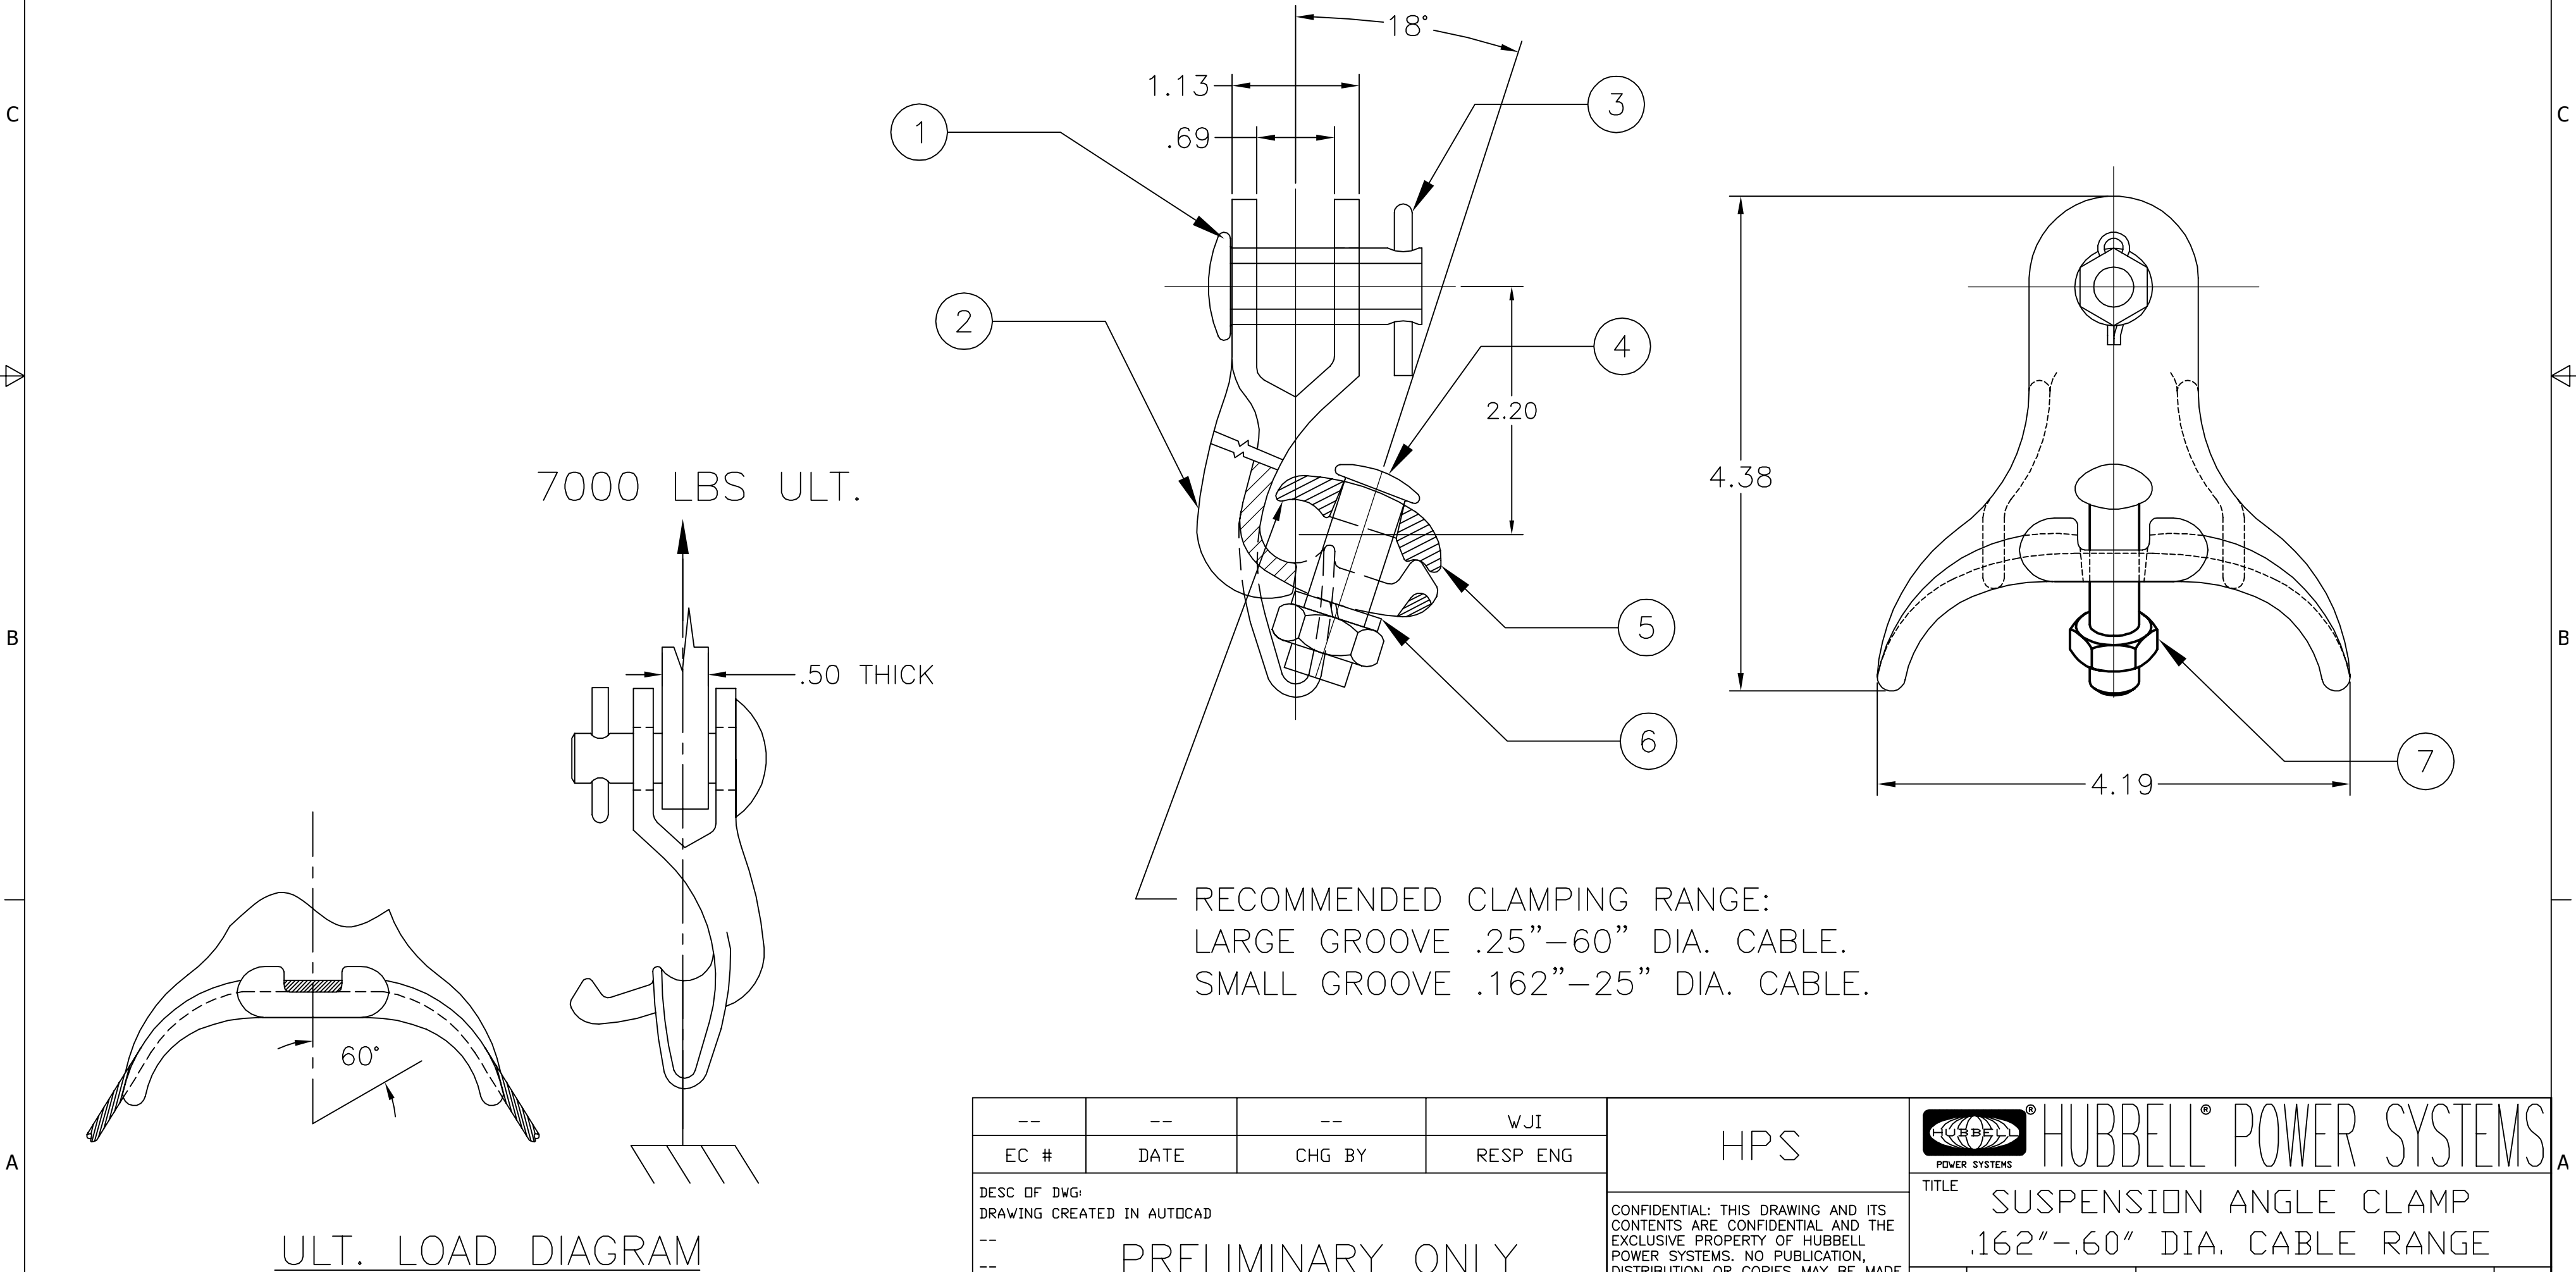

--	--	--	WJI	HPS	 HUBBELL® POWER SYSTEMS									
EC #	DATE	CHG BY	RESP ENG		TITLE									
DESC OF DWG: DRAWING CREATED IN AUTOCAD -- -- -- <u>PRELIMINARY ONLY</u> REASON (S) FOR CHANGE: -- DISPOSITION OF MAT'L:				CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.				SUSPENSION ANGLE CLAMP .162"-.60" DIA. CABLE RANGE						
								SIZE	DWG NO.		CAT / PART / ASSY NO.			REV
								C	CUTSHEET		814602000			A
								DO NOT SCALE THIS DRAWING		DRN BY SPR		DATE 05/11/18		SHEET 1 OF 1