


ITEM NO.	DESCRIPTION	QTY.
1	SC CONNECTOR DUST CAP	4
2	SC CONNECTOR BODY	4
3	SC DUPLEX CLIP	2
4	1.8mm SC CONNECTOR BOOT	4
5	1.8mm DUPLEX CABLE	A/R

CATALOG NUMBER	DESCRIPTION
DFPSCSDxMM	50/125um OM2 SC-SC DUPLEX CORD

"x" = 1 THRU 25 METERS ("LENGTH" IN METERS)

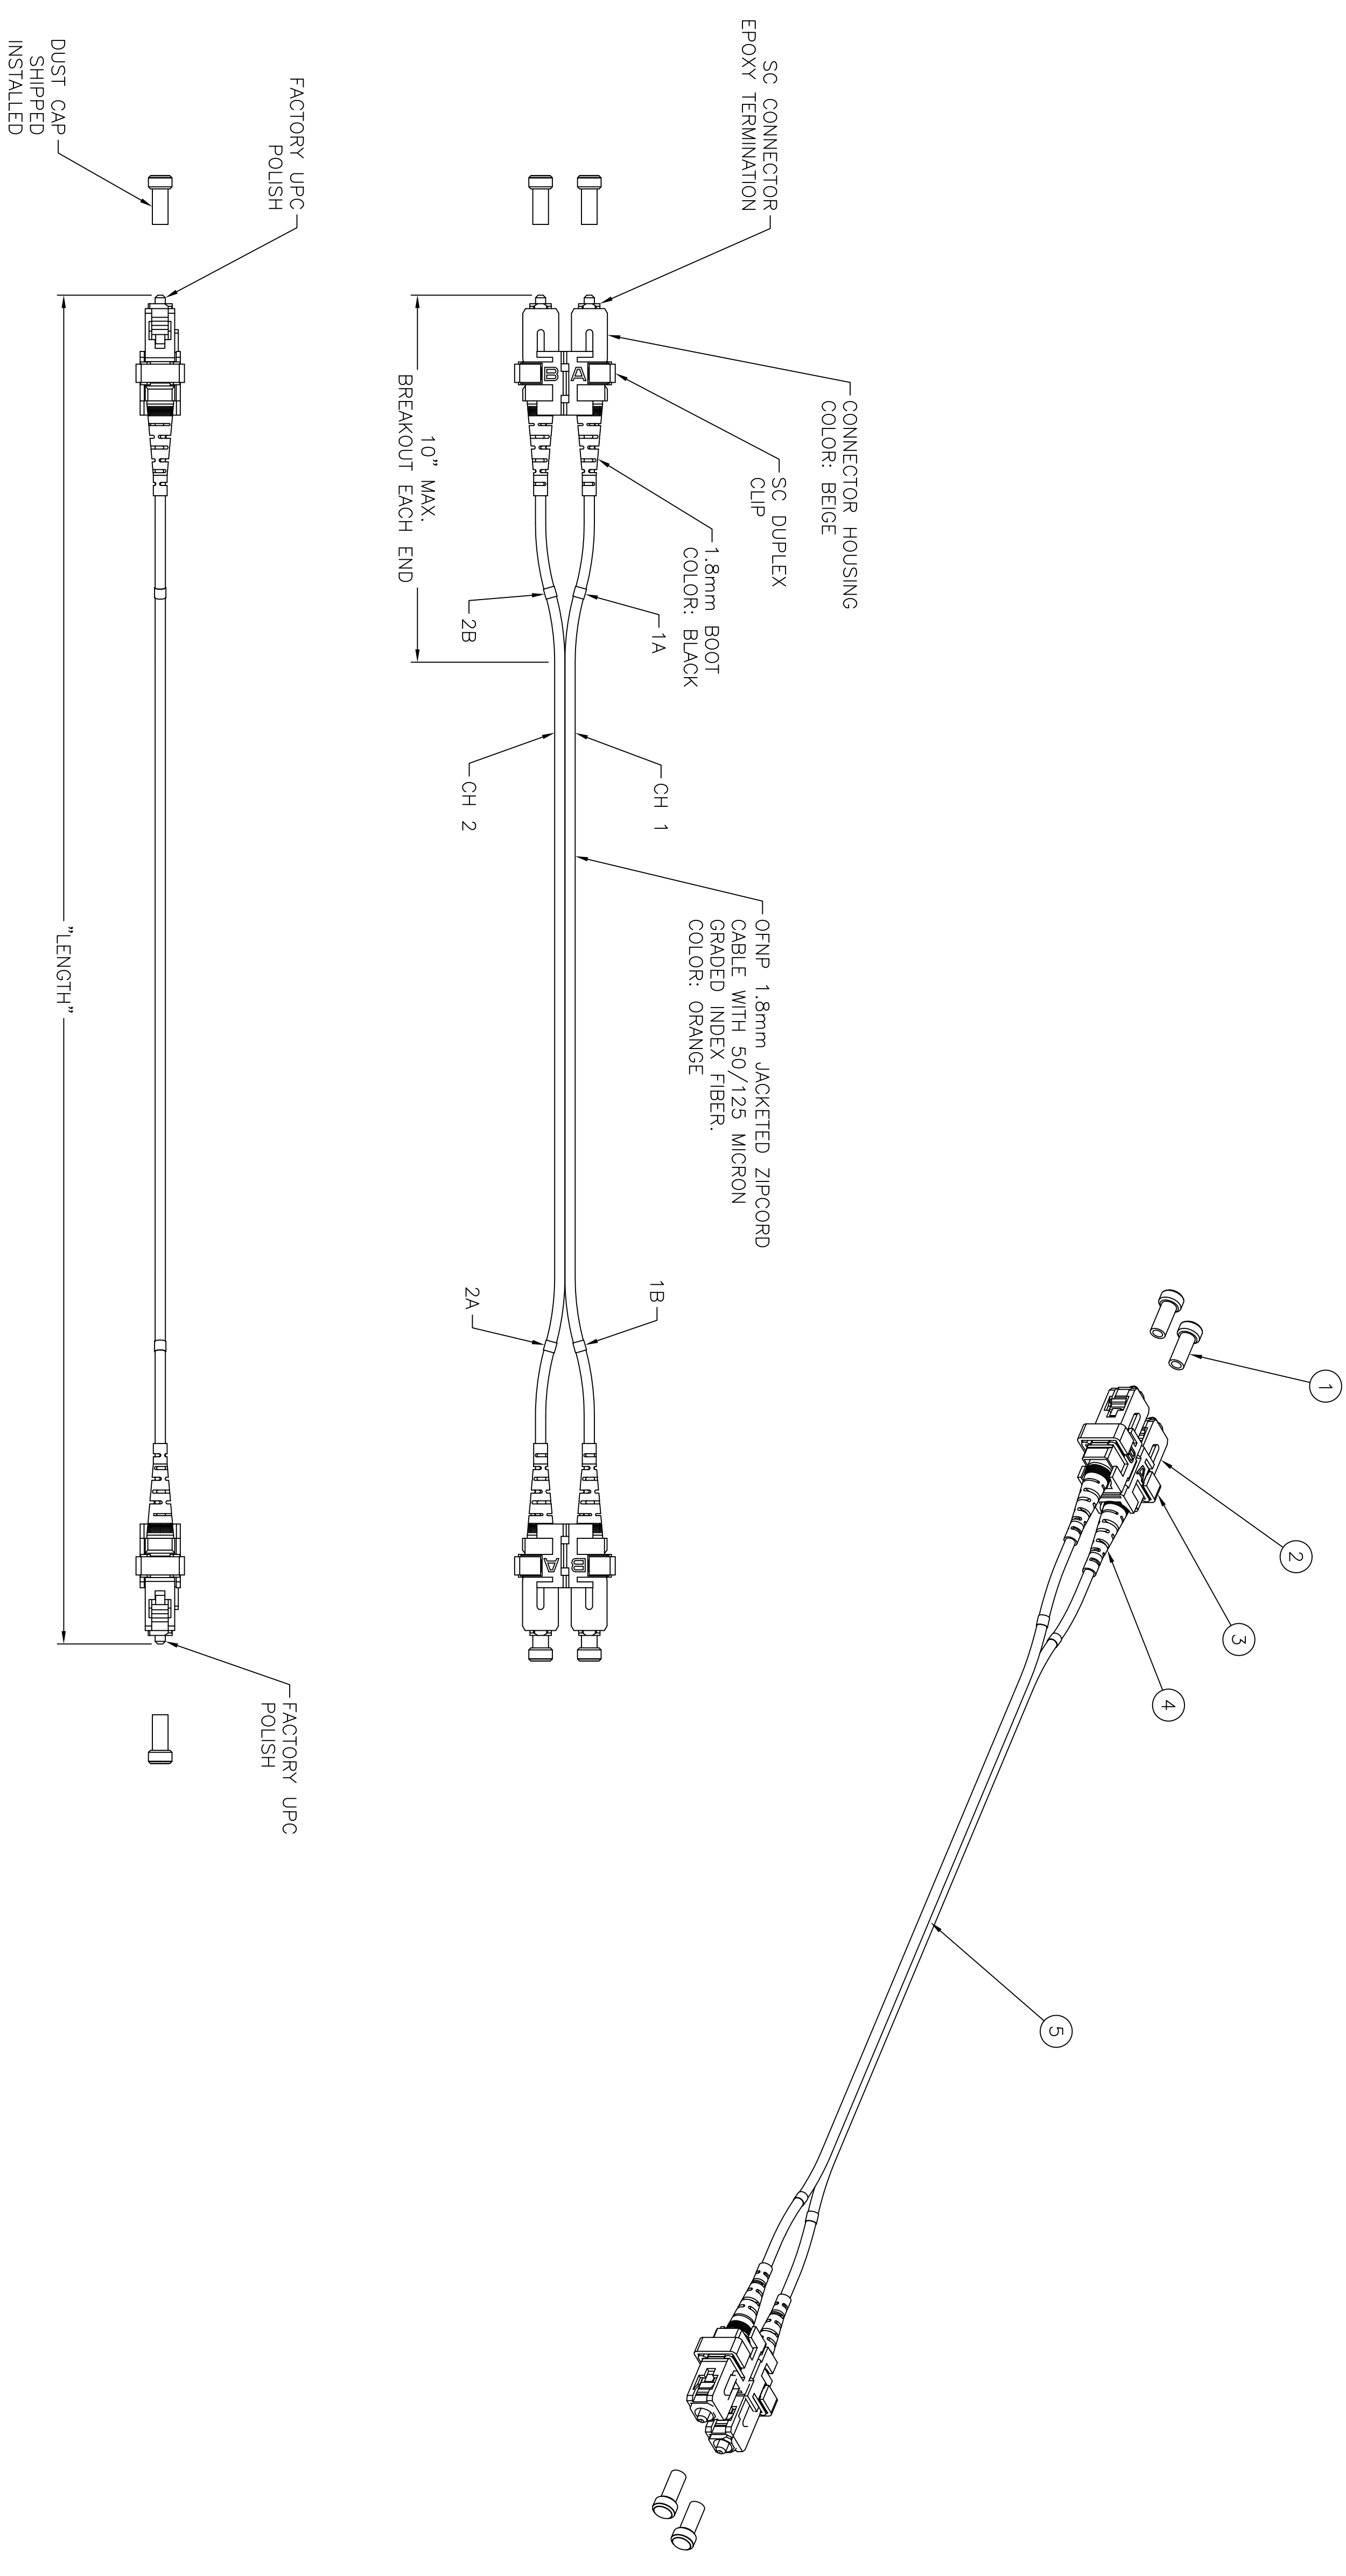

NOTES:

- CONNECTOR OPTICAL, MECHANICAL, AND ENVIRONMENTAL PERFORMANCE MEETS TIA/EIA-568-C.3 SPECIFICATIONS.
- CONNECTOR USES A PC RADIUS TIP ZIRCONIA CERAMIC FERRULE.
- CONNECTOR HOUSING IS INJECTION MOLDED ENGINEERING PLASTIC RESIN.
- OPTICAL INSERTION LOSS TEST DATA INCLUDED IN EACH BAGGED PATCH CORD.
- CABLE MARKINGS TO IDENTIFY CHANNEL (1 OR 2) AND EACH END (A OR B).
- SPECIFICATIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

REV.	EGN	DATE	DESCRIPTION	CHG BY	APPD BY
C	81030	01/11/13	REVISED CABLE TO PLENUM; ADDITIONAL LENGTHS	MMA	

Created on AUTOCAD		DIMENSIONING AND TOLERANCE PER ANSI Y14.5M-1992 UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (MM). XX = ±.01 (.25) XXX = ±.005 (.127) XXXX = ±.0025 (.0635) ANGLE TOL. ±1°	
PROJECT REFERENCE:		IN ACCEPTING OUR DRAWINGS, DOCUMENTATION FOR QUALITY, DOCUMENTATION FOR QUANTITY, DOCUMENTATION FOR OPERATION, NOT TO DISCLOSE TO OTHERS THE IDEAS, INFORMATION, OR DESIGNS SHOWN HEREIN, AND THAT YOU WILL MAKE NO USE OF SAME WITHOUT PERMISSION	
DRAWN BY: PAUL S. MAQUIRE 02/12/03		HUBBELL Hubbell Premise Wiring HUBBELL INCORPORATED (Delaware) 141 Lord's Hill Road, Stonington, Connecticut 06378	
CHECKED BY: CINDY TALBOT 04/24/03		TITLE: FIBER PATCH CORDS	
APPROVED BY: CINDY TALBOT 04/24/03		ASSY. MULTIMODE SC-SC DUPLEX 50/125	
SIZE: D	DRAWING NO.: 11306C	SCALE: 1/1	REV.: C
SHEET 1 OF 1			