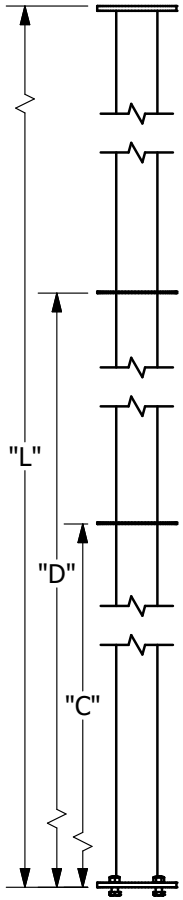

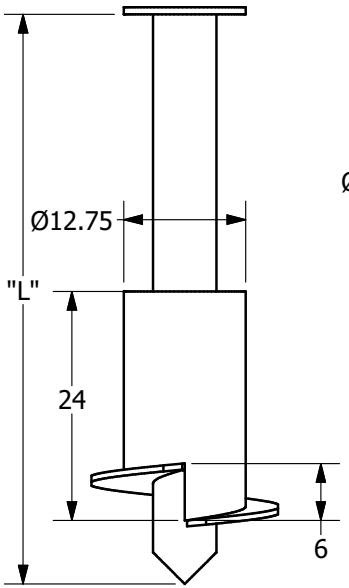

DISPLACEMENT LEAD

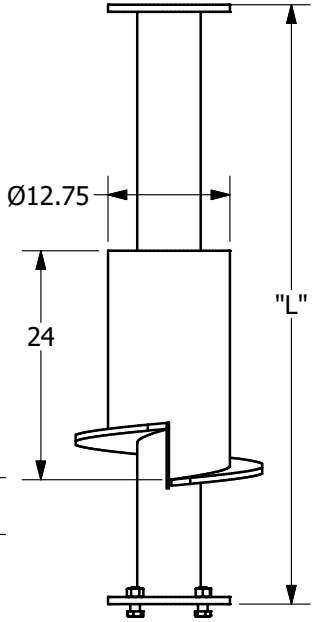

DISPLACEMENT EXTENSION

==NOTES==

1. FINISH: MILL FINISH
2. LEAD AND EXTENSION SECTION LENGTHS ARE NOMINAL
3. PIPE SHAFT MATERIAL PER ASTM A500 GRD B/C MIN 50 KSI
4. HELIX MATERIAL PER ASTM A656 OR A1018
5. COUPLING BOLT: 1.0" DIA X 3.5" LONG HEX HEAD PER SAE J429 GRD 5
6. MANUFACTURER TO HAVE IN EFFECT INDUSTRY RECOGNIZED WRITTEN QUALITY CONTORL FOR ALL MATERIAL AND MANUFACTURING PROCESSES
7. ALL WELDING TO BE DONE BY WELDERS QUALIFIED PER AWS D1.1 STRUCTURAL WELDING CODE
8. ALL MEASUREMENTS IN INCHES UNLESS NOTED OTHERWISE
9. HARDWARE IS PROVIDED WITH EXTENSIONS

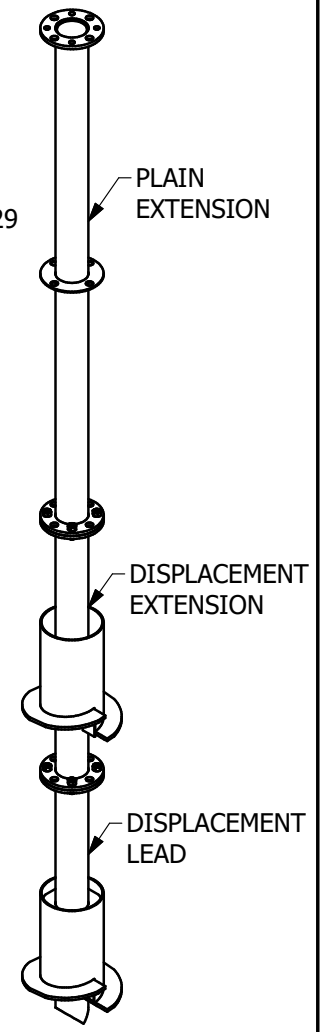

CATALOG NUMBER	DESCRIPTION	"A"	"L" (FT)	"C"	"D"
C1073738	LEAD, RS6625.280, 12" GDP X 5FT	20	5		
C1073739	EXT, RS6625.280, 12" GDP X 5FT	20	5		
C1073740	EXT, PLAIN, RS6625.280, 12" COLUMN X 5FT		5		
C1073741	EXT, PLAIN, RS6625.280, 12" COLUMN X 7FT		7		
C1073742	EXT, PLAIN, RS6625.280, 12" COLUMN X 10FT		10	60	
C1073750	EXT, PLAIN, RS6625.280, 12" COLUMN X 20FT		20	80	160

ULTIMATE TORQUE:
40,000 FT-LBS

CHANCE®

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PUBLICATION, DISTRIBUTION, OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. HUBBELL POWER SYSTEMS UNPUBLISHED ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS.

HUBBELL POWER SYSTEMS, INC.

TITLE: RS6625.280 X 12.75 OD GDP

SIZE	CAT / PART / ASSY NO.	DWG NO.	REV
B	SEE TABLE	SA1073738	B

DO NOT SCALE THIS DRAWING	DRN BY BLJ	DATE 4/21/25	SHEET 1 OF 1