

SE 207863	FIG NO.	ACCOMMODATES WIRE RANGE	B MIN.	C ±.03	H MAX.	L MAX.	N ±.02	O.D.	R REF.	T REF.	Z MIN SIDE	SOLE SIDE LENGTH	WIRE LENGTH	DIE INDEX	MECHANICAL DIELESS TOOL KIT/CHISEL	NON-ADAPTOR	INSTALLATION TOOLING																	
																	HP/BLA (C.D. REQ'D)	Y391	Y750	Y45	Y46													
YAV4C-L2-30-NK	1	4 AIRCRAFT AN 4	.47	.62	.79	1.44	.31	.38	.38	.06	.33	3/8	1/2"	40	MK4C	MH28	MH28-11	NEST DUAL	BVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL						
YAV27-L-30-NK	1	3/0 AIRCRAFT AN 3/0	.78	1.03	1.37	2.38	.52	.70	.75	.14	.52	3/8	13/16	45	---	MH28 MH28-11	NEST DUAL	BVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL	YVAL		

REV.	DATE	DESCRIPTION	BY	C.K.D.
1				

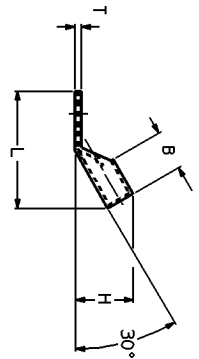
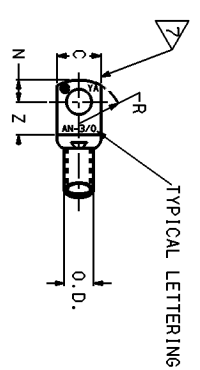


FIGURE 1

- NOTES:
1. MATERIAL: COPPER
 2. FINISH: NICKEL PLATE
 3. ADAPTOR Y3SP3 IS REQUIRED TO USE "Y34PR" TYPE INDENTORS WITH "U" TYPE NEST DIES IN Y35 AND Y750 SERIES TOOLS.
 4. ADAPTOR P76515 IS REQUIRED TO USE "U" TYPE DIES IN Y45 SERIES TOOLS.
 5. ADAPTOR PU4DP IS REQUIRED TO USE "U" TYPE DIES IN Y46 SERIES TOOLS.
 6. ALSO PNEUMATIC VERSION Y29NC.
 7. DUE TO METHODS OF MANUFACTURING, SERRATIONS MAY APPEAR ON TONGUE.

HYLUG, ONE HOLE

DWG NO.	YAV--NK (TABLE)	DATE	7/15/92
DESIGNED BY	J. GILBERT	CHKD BY	W.M. HARRIS
DRAWN BY	A.S. HARRIS	APP'D BY	W.M. HARRIS
DATE	8/1/92	REV.	0

U.S. ELECTRICAL DIVISION

REV. 0