


800PL-HD/DC Series

Digital DC Hipot Tester – 80kV & 40kV

The 800PL-HD/DC Series Hipot is a modern solution for testing the insulation strength of electrical apparatus. Outfitted with a state-of-the-art digital interface, and extensive safety features, this robust unit ensures simplistic operation, accurate results, and operator safety under all circumstances. The 800PL-HD's heavy-duty design is the perfect solution for tests that require a longer duty cycle.

The 800PL-HD Series features the most accurate kilovoltmeter readings regardless of load current. Voltage measurements are taken directly at the output of the high voltage transformer, while current is measured at the return leg to ensure the highest accuracy.

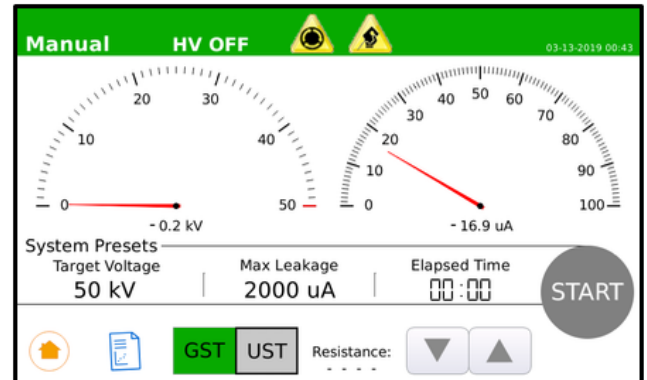

FEATURES AND BENEFITS

- ☑ DC hipot tests up to 40kV or 80kV (depending on model) at load current of 10mA
- ☑ Portable, rugged design for field use with wheels
- ☑ Measures output voltage, leakage current, insulation resistance (IR), and polarization index (PI)
- ☑ Adjustable test parameters such as target voltage, maximum leakage, ramp rate, and dwell time
- ☑ Recorded test results and data transfer via USB 2.0
- ☑ 7" color, touch screen display with adjustable brightness
- ☑ Safe operation with interlock and emergency stop
- ☑ Internal discharge solenoid

APPLICATIONS

- ☑ Motors / Generators
- ☑ Power Cables
- ☑ Aerial Lift Equipment / Bucket Trucks
- ☑ Transformers
- ☑ Electrical Switchgears / Vacuum Interrupters
- ☑ Insulated Electric Apparatus & Components



TECHNICAL SPECIFICATIONS

Model #		840PL-DC	880PL-HD
System Output	Voltage	0.4-40kV DC	0.4-80kV DC
	Current	10mA	
	Polarity	Negative Output, Positive Ground	
	DUT Insulation Resistance	10kΩ-40GΩ	
Voltage & Current Measurement Accuracy		± 1.5% of Reading ± 0.2% F.S	
Voltage Resolution		100V	
Current Resolution		0.1μA	
IR Resolution		10kΩ	
IR Accuracy		±1% of scale	
Input		90-264VAC, 45-65Hz, 900VA	
Dimensions (L x W x H)	Net	19.445in x 13.7in x 20in (49.4cm x 34.8cm x 50.7cm)	19.445in x 13.7in x 20in (49.4cm x 34.8cm x 50.7cm)
	Shipping	24in x 19in x 23in (61.0cm x 48.3cm x 58.4cm)	24in x 19in x 23in (61.0cm x 48.3cm x 58.4cm)
Weight	Net	57lbs (26kg)	78lbs (36kg)
	Shipping	70lbs (32kg)	91lbs (42kg)
Duty Cycle		15 min ON / 30 min OFF	1 hour ON / 1 hour OFF
Environmental	Operating Temperature	14...122° F (-10 ... 50°C)	
	Storage Temperature	-4...158° F (-20 ... 70°C)	
	Humidity	5... 95% non-condensing	
Safety		Emergency Stop Visual Warning Indicators External Interlock Audible Warning Indicator	Interlock Hand-switch (optional) External Warning Lamp (optional) Interlock Foot Pedal (optional)
Display		7" TFT , 800 x 480, Color Touch Screen	
Interfaces		USB 2.0 for Memory Stick	
Output Data Format		CSV	
Calibration Interval		1 year recommended	
ECCN: 3A992.A		HTS: 9030.39.0100	

SCOPE OF SUPPLY

25ft HV Output Cable with Clamp
25ft HV Return Cable with Clamp
15ft HV Ground with Clamp
6ft Input Power Cord Manual
Calibration Certificate

OPTIONAL ACCESSORIES



HHDA13-280
120kV rated grounding stick



HH-WARN-DI
Safety strobe light with magnetic base



HH-FS-DI
Foot operated interlock switch



EXT WARN
Warranty Extension to 2 to 3 years
Standard Warranty



HH-HS-DI
Hand operated interlock switch